



wirefield

# PROLED50 QRD

**50,000 hrs**  
**L80/B50**

**RECESSED  
MODULAR  
IP65**



## Technical Specification

- Steel powder coated white body with opal diffuser and screw fixings to retain diffuser.
- Recessed in a 15mm/24mm ceiling grid.
- Available in 600 x 300, 600 x 600, 1200 x 300 and 1500 x 300mm.
- IP65.
- IK05.
- Integral emergency available.


## Features

Wattage	11w to 59w
Lumens per Watt	Up to 116
CRI	80
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / <b>Eye-Wi</b>
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
QRD1114KA	11	1114	595 x 295 x 60	3.0
QRD1154KA	15	1551	595 x 295 x 60	3.0
QRD1214KA	21	2287	595 x 295 x 60	3.0
QRD2214KB	21	2287	595 x 595 x 60	4.5
QRD2294KB	29	3102	595 x 595 x 60	4.5
QRD2394KB	39	4575	595 x 595 x 60	4.5
QRD3304KB	30	3431	595 x 595 x 60	4.5
QRD3444KB	44	4653	595 x 595 x 60	4.5
QRD3594KB	59	6862	595 x 595 x 60	4.5
QRD1224KC	22	2414	1195 x 295 x 60	4.5
QRD1314KC	31	3274	1195 x 295 x 60	4.5
QRD1424KC	42	4829	1195 x 295 x 60	4.5
QRD1284KD	28	3050	1495 x 295 x 60	6.0
QRD1394KD	39	4136	1495 x 295 x 60	6.0
QRD1534KD	53	6100	1495 x 295 x 60	6.0

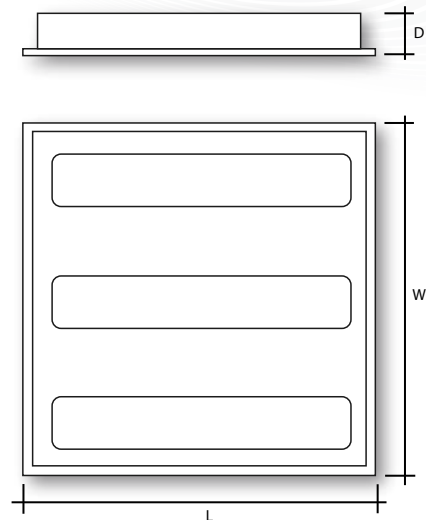

## Control Options

### Driver Options:

Fixed Output

DALI Driver

1-10v

### Sensor Options:

Microwave

Eye-Wi

## LED Options

### Additional Options:

CCT 3000K

Plasterboard Brackets

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS