



wirefield

# PROLED50 QRR

**50,000 hrs**  
**L80/B50**

**RECESSED  
MODULAR  
IP65**



## Technical Specification

- Steel powder coated white body with opal diffuser and screw fixings to retain diffuser.
- Recessed in a 15mm/24mm ceiling grid.
- Available in 600 x 600, 1200 x 300, 1200 x 600 and 1500 x 300mm.
- IP65.
- IK05.
- Integral emergency available.


## Features

Wattage	30w to 123w
Lumens per Watt	Up to 125
CRI	80
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / <b>Eye-Wi</b>
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
QRR3294KB	30	3202	595 x 595 x 85	4.5
QRR3444KB	44	4343	595 x 595 x 85	4.5
QRR4394KB	39	4270	595 x 595 x 85	4.5
QRR4584KB	58	5791	595 x 595 x 85	4.5
QRR1334KB	33	4060	595 x 595 x 75	4.4
QRR1384KB	38	4691	595 x 595 x 75	4.4
QRR1574KB	57	6485	595 x 595 x 75	4.4
QRR2424KC	42	4507	1195 x 295 x 85	4.5
QRR2624KC	62	6112	1195 x 295 x 85	4.5
QRR2834KC	83	9014	1195 x 295 x 85	4.5
QRR3624KE	62	6761	1195 x 595 x 85	9.0
QRR3924KE	92	9168	1195 x 595 x 85	9.0
QRR4834KE	83	9014	1195 x 595 x 85	9.0
QRR41234KE	123	12225	1195 x 595 x 85	9.0
QRR2534KD	53	5693	1495 x 295 x 85	6.0
QRR2784KD	78	7721	1495 x 295 x 85	6.0
QRR21054KD	105	11386	1495 x 295 x 85	6.0

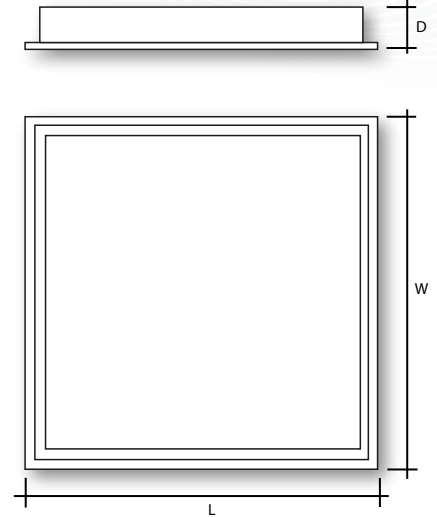

Control Options

Driver Options: Fixed Output  
 DALI Driver  
 1-10v

Sensor Options: Microwave  
 Eye-Wi Reporting

LED Options

Additional Options:  
 CCT 3000K  
 Plasterboard Brackets

Emergency Options

Emergency Options:  
 3hr Integral Maintained  
 3hr Integral Maintained Self Test  
 3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS