



wirefield

PROLED50 QSD

50,000 hrs
L80/B50

SURFACE
LINEAR OR
MODULAR
IP65



Technical Specification

- Steel powder coated white body with opal diffuser and screw fixings to retain diffuser.
- Surface mounted..
- Available in 600 x 600, 1200 x 180 and 1500 x 180mm.
- IP65.
- IK05.
- Integral emergency available.


Features

Wattage	21w to 59w
Lumens per Watt	Up to 116
CRI	80
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / Eye-Wi
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
QSD2214KB	21	2287	602x 602 x 65	4.5
QSD2294KB	29	3102	602x 602 x 65	4.5
QSD2394KB	39	4575	602x 602 x 65	4.5
QSD3304KB	30	3431	602x 602 x 65	4.5
QSD3444KB	44	4653	602x 602 x 65	4.5
QSD3594KB	59	6862	602x 602 x 65	4.5
QSD1224KC	22	2414	1203 x 180 x 65	4.0
QSD1314KC	31	3274	1203 x 180 x 65	4.0
QSD1424KC	42	4829	1203 x 180 x 65	4.0
QSD1284KD	28	3050	1503 x 180 x 65	5.0
QSD1394KD	39	4136	1503 x 180 x 65	5.0
QSD1534KD	53	6100	1503 x 180 x 65	5.0

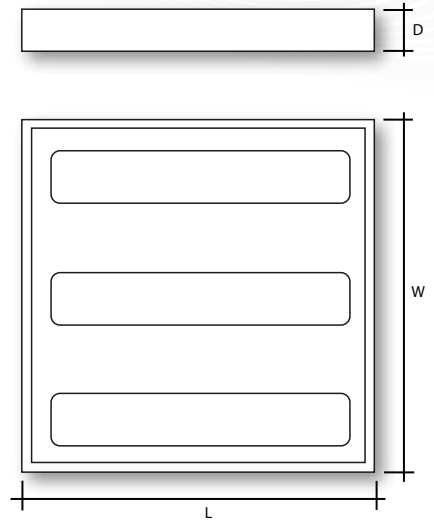

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Sensor Options:

Microwave

Eye-Wi

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS