



wirefield PROLED50 REC

50,000 hrs
L80/B50

ARCHITECTURAL
RECESSED WALL



Technical Specification

- Die cast aluminium body.
- Frosted tempered glass diffuser.
- IP54.
- IK08.
- RAL colour options.
- Decorative grille option.


Features

Wattage	4w
Lumens per Watt	Up to 64
CRI	80+
L**B**	50,000 hours L80 B50
Driver	Fixed Output
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Cut Out (mm)	Weight (kg)
REC1044K	4	232	4000K	255 x 80 x 70	240 x 62	1.2
REC1044K	4	116	4000K	255 x 80 x 70	240 x 62	1.2

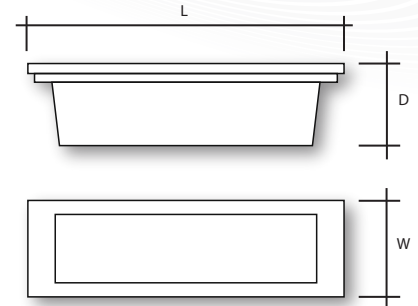

Control Options

Driver Options:

Fixed Output
DALI Driver

Sensor Options:

Microwave

LED Options

Additional Options:

CCT 3000K

Accessories

Optional Accessories:

RAL colour options
Decorative grille

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS