



wirefield

# PROLED50 REO

**50,000 hrs**  
**L80/B50**

ARCHITECTURAL  
HALO EFFECT  
AMENITY



## Technical Specification

- Die cast aluminium body.
- Impact resistant, UV stable opal polycarbonate diffuser.
- Direct / Indirect light distribution.
- IP54.
- IK08.
- Integral emergency options.
- RAL colour options.



## Features

Wattage	14w
Lumens per Watt	Up to 86
CRI	80+
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali
Controls	Microwave
Colour Temperature	4000k
Temperature Rating	-25°C to +40°C

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	CCT	Ø x D (mm)	Weight (kg)
REO1144K	14	1173	4000K	265 x 90	1.7
REO1144KLOU	14	722	4000K	265 x 100	2.0

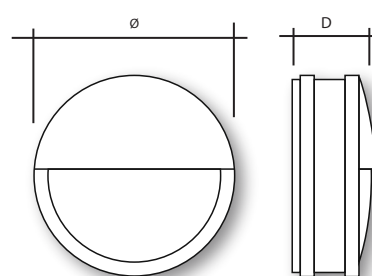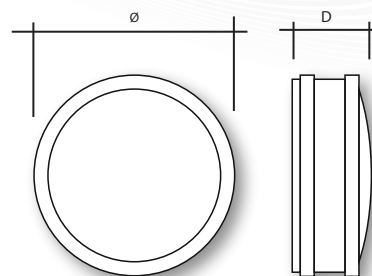

## Control Options

**Driver Options:**

Fixed Output  
DALI Driver

**Sensor Options:**

Microwave

## LED Options

**Additional Options:**

CCT 3000K

## Accessories

**Optional Accessories:**

RAL colour options

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR ARCHITECTURAL APPLICATIONS*