



wirefield

PROLED50 SHP

50,000 hrs
L80/B50

IP65 SQUARE
AMENITY BULKHEAD



Technical Specification

- UV Stable Thermoplastic body and opal PMMA diffuser.
- Surface mounted.
- Optional staircase & corridor function.
- IP65.
- IK08.
- Integral emergency available.

Features

Wattage	10w or 15w
Lumens per Watt	Up to 115
CRI	80+
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V / Corridor Function
Controls	Microwave
Colour Temperature	4000k
Temperature Rating	-15°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR AMENITY APPLICATIONS


Product Specification

WHITE

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
SHP1103KW	10	1107	3000	295 x 295 x 90	1.5
SHP1153KW	15	1547	3000	295 x 295 x 90	1.5
SHP1104KW	10	1167	4000	295 x 295 x 90	1.5
SHP1154KW	15	1631	4000	295 x 295 x 90	1.5

ANTHRACITE

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
SHP1103KA	10	1107	3000	295 x 295 x 90	1.5
SHP1153KA	15	1547	3000	295 x 295 x 90	1.5
SHP1104KA	10	1167	4000	295 x 295 x 90	1.5
SHP1154KA	15	1631	4000	295 x 295 x 90	1.5

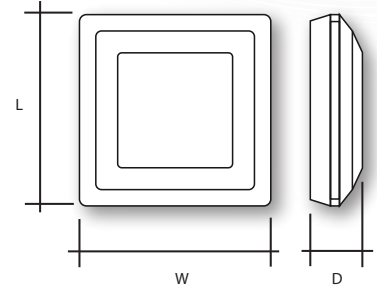

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

Sensor Options:

MW On/Off

MWRF - Corridor function master or slave dimming

MWRF - Corridor function master or slave non-dimming

LED Options

Additional Options:

CCT 3000K / 4000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

Accessories

Optional Accessories:

Decorative louvre

Polycarbonate IK10 diffuser

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR AMENITY APPLICATIONS