



wirefield PROLED75 DAR

75,000 hrs
L80/B50

**RECESSED
MODULAR
IP65**



Technical Specification

- Steel powder coated white body with double parabolic louvre.
- LED modules and clear acrylic diffuser.
- Recessed in a 15mm/24mm ceiling grid or plasterboard ceiling with optional brackets.
- IP65.
- IK05.
- Integral emergency available.
- UGR <19.


Features

Wattage	19w to 43w
Lumens per Watt	Up to 125
CRI	80
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	Microwave / 
Colour Temperature	4000k
Temperature Rating	-15°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
DAR2294KB	29	3430	595 x 595 x 60	4.0
DAR3394KB	39	4573	595 x 595 x 60	4.1
DAR3434KB	43	4912	595 x 595 x 60	4.1
DAR1194KC	19	2382	1195 x 295 x 60	4.0
DAR1294KC	29	3430	1195 x 295 x 60	4.0

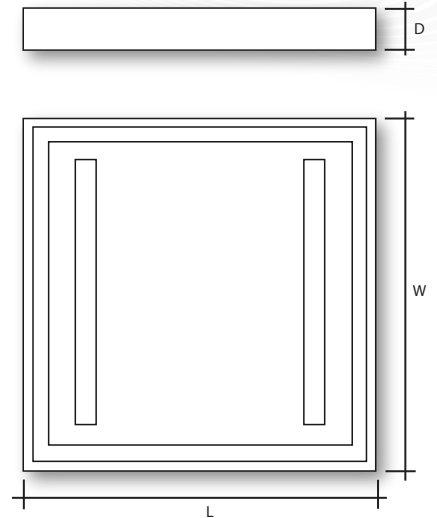

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Sensor Options:

Microwave

Eye-Wi

LED Options

Additional Options:

CCT 3000K

Plasterboard Ceiling Support Brackets

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS