




wirefield

PROLED 75 HCC LG3 HP

75,000 hrs
L80/B50

SUSPENDED LINEAR

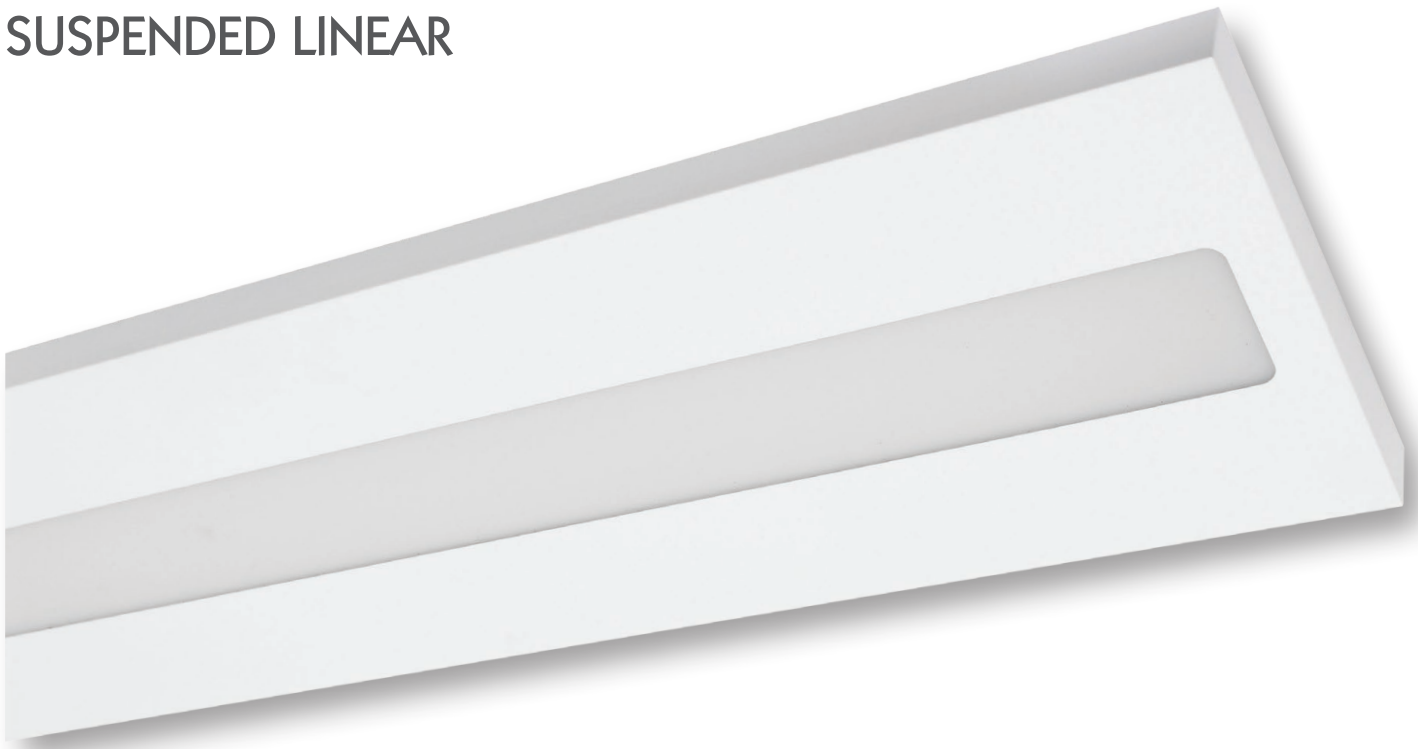

Technical Specification

- Steel body with micro prismatic diffuser.
- Suspended - 70% down - 30% up, light distribution.
- Available with connection accessory for continuous run.
- IP44.
- IK05.
- Integral emergency available.
- Low glare.
- RAL colour options.
- LG3 compliant.


Features

| | |
|--------------------|------------------------------------|
| Wattage | 50w to 66w |
| Lumens per Watt | Up to 126 |
| CRI | 80+ |
| L**B** | 75,000 hours L80 B50 |
| Driver | Fixed Output / Dali / Switch Dim |
| Controls | CF / Bluetooth |
| Colour Temperature | 4000k |
| Temperature Rating | 0°C to +35°C (excluding emergency) |

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

| Code | Watts | Delivered lumens | CCT | L x W x D (mm) | Weight (kg) |
|--------------|-------|------------------|------|-----------------|-------------|
| HCC1504KBLG3 | 50 | 6286 | 4000 | 1215 x 175 x 40 | 4.6 |
| HCC1664 3 | 66 | 8381 | 4000 | 1495 x 175 x 40 | 5.6 |

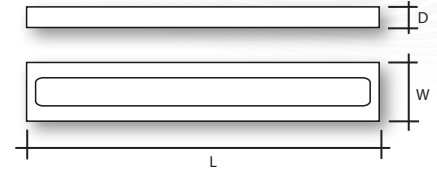

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

Sensor Options:

Corridor Function

Bluetooth Control

LED Options

Additional Options:

CCT 3000K

Tunable white 2700K - 6500K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Integral Emergency with 'Escape Route' Optic

Integral Emergency with 'Open Area' Optic

Accessories

Optional Accessories:

RAL Colour Options

Joint Pieces for Continuous Run

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS