



wirefield

PROLED 75 HCS HP

75,000 hrs
L80/B50

**SURFACE LINEAR AND
MODULAR**



Technical Specification

- Steel body with micro prismatic diffuser.
- Surface mounting.
- IP44.
- IK05.
- Integral emergency available.
- Low glare.
- RAL colour options.
- Optional Bluetooth control and tunable white.

Features


Wattage	21w to 49w
Lumens per Watt	Up to 133
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	Microwave Sensor / Bluetooth / Integral Daylight Sensor / CF / Smart Sensor
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED 75 HCS HP

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
HCS1214KA	21	2623	4000	595 x 175 x 40	2.0
HCS1394KB	39	5246	4000	1215 x 175 x 40	3.8
HCS1504KC	49	6557	4000	1495 x 175 x 40	4.6
HCS2394KD	39	5246	4000	595 x 295 x 40	3.8

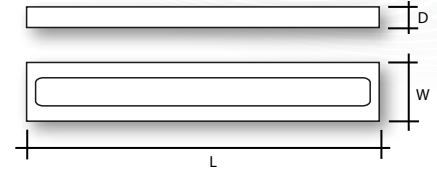

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

Sensor Options:

Microwave Sensor

Bluetooth Control

Integral Daylight Sensor

Corridor Function

Smart Sensor

LED Options

Additional Options:

CCT 3000K

Tunable white 2700K - 6500K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Integral Emergency with 'Escape Route' Optic

Integral Emergency with 'Open Area' Optic

Accessories

Optional Accessories:

RAL Colour Options

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk