



wirefield

# PROLED 75 IWS HP

**75,000 hrs**  
**L80/B50**

**SURFACE OR SUSPENDED  
MULTI BAY**



## Technical Specification

- White painted aluminium body.
- Surface or suspended mounting.
- IP65.
- IK08.
- Integral emergency options.
- Multiple beam angles available .

## Features


Wattage	73w to 256w
Lumens per Watt	Up to 152
CRI	80
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Corridor Function
Controls	PIR
Colour Temperature	4000k
Temperature Rating	-20°C to +35°C

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

# wirefield PROLED 75 IWS HP

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
IWS1734KA90HP	73	11000	435 x 343 x 78	2.8
IWS1854KA90HP	85	12680	435 x 343 x 78	2.8
IWS11454KB90HP	145	22000	645 x 343 x 78	4.3
IWS11714KB90HP	171	25360	645 x 343 x 78	4.3
IWS12184KC90HP	218	33000	945 x 343 x 78	6.5
IWS12564KC90HP	256	38000	945 x 343 x 78	6.5

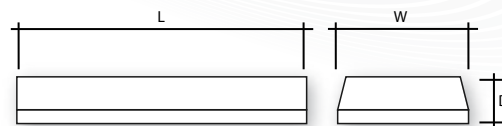

## Control Options

### Driver Options:

Fixed Output

DALI Driver

CF – never off

CF – off 1 minute

CF – off 30 minutes

### Sensor Options:

PIR/7M - PIR up to 7m on/off

PIR/12M - PIR up to 12m on/off

PIR/15M - PIR up to 15m on/off

## LED Options

### Additional Options:

30 x 70° beam angle

40 x 40° beam angle

60 x 60° beam angle

90 x 90° beam angle

120 x 120° beam angle

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral with DALI Interface

## Accessories

### Optional Accessories:

Wireguard

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: [www.wirefield.co.uk](http://www.wirefield.co.uk) Email: [sales@wirefield.co.uk](mailto:sales@wirefield.co.uk)