



wirefield

# PROLED 75 NCR HP

**75,000 hrs**  
**L80/B50**

IP66 LUMINAIRE  
FOR AGGRESSIVE  
ENVIRONMENTS



## Technical Specification

- IP66 / IK06.
- UV stabilized thermoplastic body.
- Opal acrylic diffuser.
- Stainless steel clips.
- Surface or suspended mount.

## Features


Wattage	21w to 81w
Lumens per Watt	Up to 148
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Switch Dim / Dali / 1-10V / Corridor Function
Controls	Microwave
Colour Temperature	4000k
Temperature Rating	-20°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

# wirefield PROLED 75 NCR HP

## Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
NCR1213KAHP	21	2627	3000	662 x 96 x 111	1.3
NCR2273KAHP	27	3861	3000	662 x 146 x 111	1.8
NCR1503KBHP	50	6535	3000	1272 x 96 x 111	2.1
NCR2643KBHP	64	9141	3000	1272 x 96 x 111	2.1
NCR1633KCHP	63	8169	3000	1572 x 96 x 111	2.6
NCR2813KCHP	81	11426	3000	1572 x 96 x 111	2.6
NCR1214KAHP	21	2745	4000	662 x 96 x 111	1.3
NCR2274KAHP	27	4034	4000	662 x 146 x 111	1.8
NCR1504KBHP	50	6829	4000	1272 x 96 x 111	2.1
NCR2644KBHP	64	9547	4000	1272 x 96 x 111	2.1
NCR1634KCHP	63	8537	4000	1572 x 96 x 111	2.6
NCR2814KCHP	81	11934	4000	1572 x 96 x 111	2.6

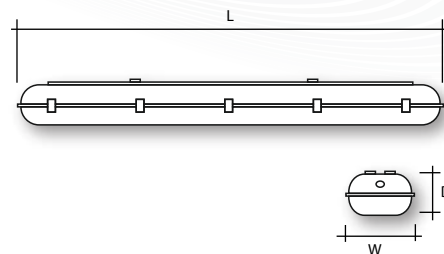

## Control Options

### Driver Options:

Fixed Output

DALI

1-10v

CF - Never off

CF - Off 1 minute

CF - Off 30 minutes

### Sensor Options:

MW - On/Off

MWRF - Corridor function master or slave dimming

MWRF - Corridor function master or slave non-dimming

## LED Options

### Additional Options:

CCT 3000K

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

Luminaire is not suitable for full external mounting. Please review the GTB66 luminaire if required and speak to the Wirefield Sales Office for more information.

**LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS**

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: [www.wirefield.co.uk](http://www.wirefield.co.uk) Email: [sales@wirefield.co.uk](mailto:sales@wirefield.co.uk)