



wirefield

PROLED 75 NET HP

75,000 hrs
L80/B50

**IP66 EXTREME
TEMPERATURE
LUMINAIRE**



Technical Specification

- PC body with opal PC diffuser.
- IP66.
- IK10.
- Stainless steel clips.
- Surface mount as standard and can be suspended.

Features


Wattage	53w to 66w
Lumens per Watt	Up to 153
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim / Corridor Function
Colour Temperature	4000k
Temperature Rating	-40°C to +50°C

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

wirefield PROLED 75 NET HP

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
NET2534KBHP	53	8068	1272 x 146 x 111	2.8
NET1554KCHP	55	7719	1572 x 96 x 111	2.6
NET2664KCHP	66	10085	1572 x 146 x 111	3.3

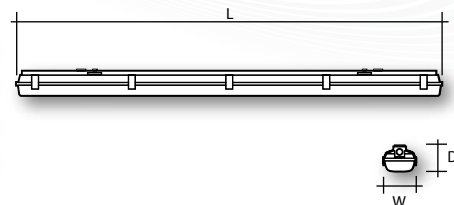

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

CF - Never off

CF - Off 1 minute

CF - Off 30 minutes

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

Luminaire is not suitable for full external mounting. Please review the GTB66 luminaire if required and speak to the Wirefield Sales Office for more information.

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk