



wirefield PROLED 75 PBL

75,000 hrs
L80/B50

DECORATIVE
SURFACE
MODULAR



Technical Specification

- Powder coated light grey steel body.
- Opal PMMA diffuser.
- 4 modular size options.
- Integral emergency options.
- RAL colour options.


Features

Wattage	9w to 147w
Lumens per Watt	Up to 105
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
PBL1094KA	9	779	4000K	382 x 382 x 75	1.9
PBL1124KA	12	1063	4000K	382 x 382 x 75	1.9
PBL1174KA	17	1441	4000K	382 x 382 x 75	1.9
PBL1334KB	33	3508	4000K	1132 x 382 x 75	4.4
PBL1404KB	40	4052	4000K	1132 x 382 x 75	4.4
PBL1604KB	60	5594	4000K	1132 x 382 x 75	4.4
PBL1334KC	33	3508	4000K	632 x 632 x 75	4.5
PBL1404KC	40	4052	4000K	632 x 632 x 75	4.5
PBL1604KC	60	5594	4000K	632 x 632 x 75	4.5
PBL1704KD	70	7011	4000K	882 x 882 x 75	5.7
PBL11024KD	102	9563	4000K	882 x 882 x 75	5.7
PBL11474KD	147	12972	4000K	882 x 882 x 75	5.7

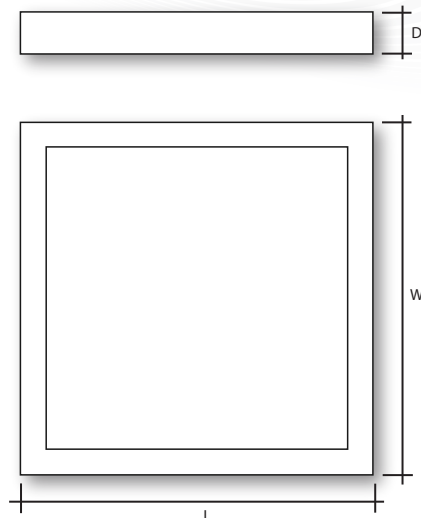

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk