




wirefield

# PROLED 75 PBQ

**100,000 hrs**  
**L80/B50**

DECORATIVE  
SUSPENDED  
MODULAR

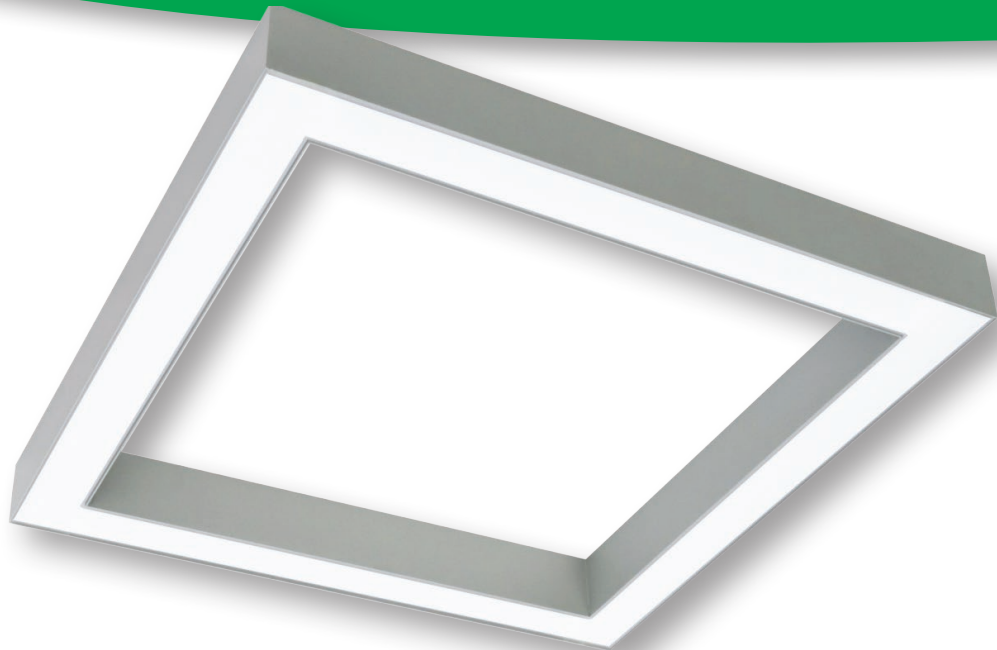

## Technical Specification

- Powder coated light grey steel body.
- Opal polycarbonate diffuser.
- 2 modular size options.
- IP40
- IK05
- RAL colour options.


## Features

Wattage	36w to 104w
Lumens per Watt	Up to 125
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
PBQ1364KA	36	4542	4000K	900 x 900 x 68	6.60
PBQ1534KA	53	6181	4000K	900 x 900 x 68	6.60
PBQ1784KA	78	8383	4000K	900 x 900 x 68	6.60
PBQ1494KB	49	6056	4000K	1180 x 1180 x 68	8.80
PBQ1704KB	70	8241	4000K	1180 x 1180 x 68	8.80
PBQ11044KB	104	11177	4000K	1180 x 1180 x 68	8.80

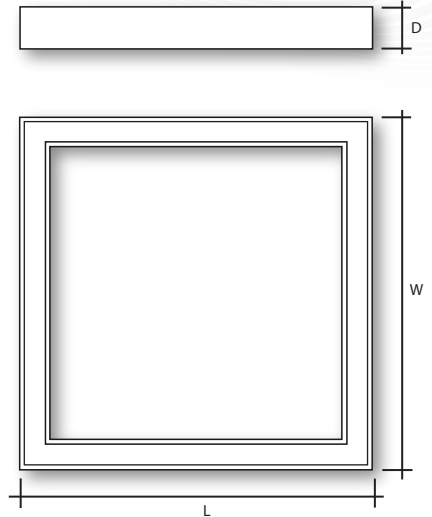

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

LED Options

Additional Options:

CCT 3000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*