



wirefield PROLED75 QSR

75,000 hrs
L80/B50

**SURFACE
LINEAR OR
MODULAR
IP65**



Technical Specification

- Steel powder coated white body with opal PMMA diffuser and screw fixings to retain diffuser.
- Surface mounted.
- Available in 600 x 600 and 1200 x 300mm.
- IP65.
- IK05.
- Integral emergency available.


Features

Wattage	30w to 83w
Lumens per Watt	Up to 116
CRI	80
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / 
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
QSR3294KB	30	3202	602 x 602 x 85	5.0
QSR3444KB	44	4343	602 x 602 x 85	5.0
QSR4394KB	39	4270	602 x 602 x 85	5.0
QSR4584KB	58	5791	602 x 602 x 85	5.0
QSR1334KB	33	4060	602 x 602 x 85	5.0
QSR1384KB	38	4691	602 x 602 x 85	5.0
QSR1574KB	57	6485	602 x 602 x 85	5.0
QSR2424KC	42	4507	1203 x 302 x 85	5.0
QSR2624KC	62	6112	1203 x 302 x 85	5.0
QSR2834KC	83	9014	1203 x 302 x 85	5.0

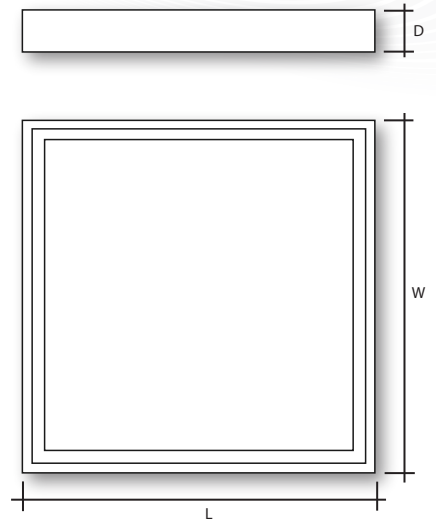

Control Options

Driver Options:

Fixed Output

DALI Driver

1-10v

Sensor Options:

Microwave

Eye-Wi

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS