



wirefield PROLED 75 RBR

75,000 hrs
L80/B50

RECESSED
FRAMELESS
DECORATIVE



Technical Specification

- Powder coated steel body.
- UV stable PMMA diffuser.
- 5 length options.
- Optional micro-prismatic diffuser.


Features

Wattage	10w to 33w
Lumens per Watt	Up to 116
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Cut Out (mm)	Weight (kg)
RBR1114KA	11	1094	4000K	220 x 220 x 85	224 x 224	1.80
RBR1154KA	15	1529	4000K	220 x 220 x 85	224 x 224	1.80
RBR1104KB	10	1121	4000K	595 x 85 x 65	599 x 89	1.80
RBR1144KB	14	1525	4000K	595 x 85 x 65	599 x 89	1.80
RBR1154KC	15	1681	4000K	875 x 85 x 65	879 x 89	2.10
RBR1214KC	21	2287	4000K	875 x 85 x 65	879 x 89	2.10
RBR1194KD	19	2241	4000K	1155 x 85 x 65	1159 x 89	2.40
RBR1264KD	26	3050	4000K	1155 x 85 x 65	1159 x 89	2.40
RBR1244KE	24	2801	4000K	1435 x 85 x 65	1439 x 89	2.80
RBR1334KE	33	3812	4000K	1435 x 85 x 65	1439 x 89	2.80

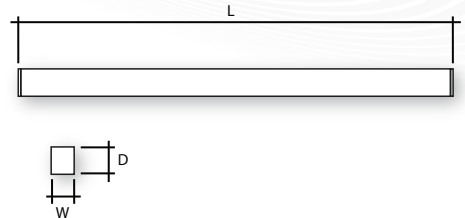

Control Options

Driver Options:

- Fixed Output
- DALI
- Switch Dim

LED Options

Additional Options:

- CCT 3000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS