



wirefield PROLED75 RDA

75,000 hrs
L80/B50

RECESSED
DOWNLIGHT



Technical Specification

- White powder coated aluminium body.
- Faceted 60° low glare aluminium reflector with glass cover.
- IP44.
- IK05.
- 165mm cut-out.
- Optional opal or micro-prismatic diffuser.
- Emergency options.
- RAL colour options.

Features


Wattage	14w to 28w
Lumens per Watt	Up to 117
CRI	80
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	Eye-Wi
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	Ø x H (mm)	Cut Out (mm)	Weight (kg)
RDA1144KOP	14	1500	4000	195 x 100	165	0.8
RDA1204KOP	20	2081	4000	195 x 100	165	0.8
RDA1284KOP	28	2807	4000	195 x 100	165	0.8
RDA1144KMP	14	1539	4000	195 x 100	165	0.8
RDA1204KMP	20	2135	4000	195 x 100	165	0.8
RDA1284KMP	28	2880	4000	195 x 100	165	0.8
RDA1144KLG	14	1656	4000	195 x 100	165	0.8
RDA1204KLG	20	2297	4000	195 x 100	165	0.8
RDA1284KLG	28	3099	4000	195 x 100	165	0.8

OP = Opal diffuser MP = Micro-prismatic diffuser LG = Low-glare reflector with glass cover

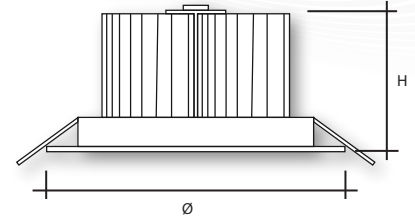

Control Options

Driver Options:

Fixed Output

DALI Driver

Switch Dim

Sensor Options:



LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Emergency pack

3hr Emergency pack

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk