



wirefield PROLED75 RDC

75,000 hrs
L80/B50

RECESSED
DOWNLIGHT



Technical Specification

- White powder coated aluminium body and opal diffuser.
- IP44.
- IK04.
- Emergency options.
- RAL colour options.


Features

Wattage	10w to 23w
Lumens per Watt	Up to 116
CRI	80
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	Eye-Wi
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	Ø x H (mm)	Cut Out (mm)	Weight (kg)
RDC1103K	10	1006	200 x 90	185	0.8
RDC1133K	13	1412	200 x 90	185	0.8
RDC1193K	19	1942	200 x 90	185	0.8
RDC1123K	12	1261	235 x 90	220	0.9
RDC1163K	16	1774	235 x 90	220	0.9
RDC1233K	23	2458	235 x 90	220	0.9
RDC1104K	10	1053	200 x 90	185	0.8
RDC1134K	13	1479	200 x 90	185	0.8
RDC1194K	19	2035	200 x 90	185	0.8
RDC1124K	12	1321	235 x 90	220	0.9
RDC1164K	16	1858	235 x 90	220	0.9
RDC1234K	23	2575	235 x 90	220	0.9

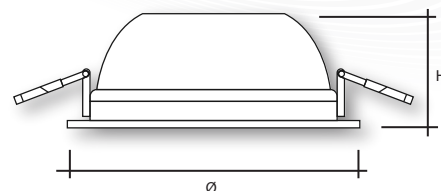

Control Options

Driver Options:

Fixed Output

DALI Driver

Switch Dim

Sensor Options:



LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Emergency pack

3hr Emergency pack

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS