



wirefield PROLED75 RLN HP

75,000 hrs
L80/B50

HIGH POWER RECESSED
LINEAR FOR SUSPENDED
CEILING



Technical Specification

- Powder coated steel body.
- Opal PMMA or micro-prismatic diffuser.
- 595mm and 1195mm option.
- Emergency options.
- In-line connection option.

Features


Wattage	19w to 38w
Lumens per Watt	Up to 113
CRI	80 +
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED 75 RLN HP

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Cut Out (mm)	Weight (kg)
RLN1194KA	19	2151	4000K	595 x 95 x 62		1.80
RLN1384KB	38	4302	4000K	1195 x 95 x 62		2.40

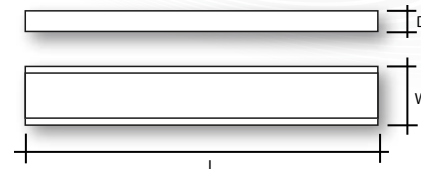

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

LED Options

Additional Options:

CCT 3000K

Tunable White 2700K to 6500K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Accessories

Optional Accessories:

3 Pole or 5 pole pre-wired Wieland connector - 0.5m

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk

WIREFIELD 201905 V1.0