



wirefield

# PROLED 75 RLS HP

**75,000 hrs**  
**L80/B50**

RECESSED LINEAR FOR  
SUSPENDED CEILING



## Technical Specification

- Powder coated steel body.
- Opal PMMA or micro-prismatic diffuser.
- Emergency options.
- In-line connection option.

## Features


Wattage	15w
Lumens per Watt	Up to 110
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

# wirefield PROLED 75 RLS HP

## Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Cut Out (mm)	Weight (kg)
RLS1154K	15	1613	4000K	336 x 336 x 62		2.20

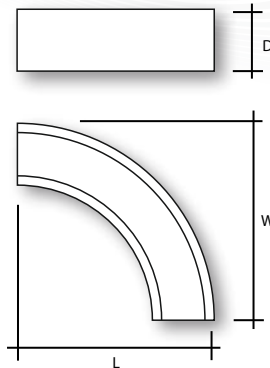

## Control Options

### Driver Options:

Fixed Output

DALI

Switch Dimm

## LED Options

### Additional Options:

CCT 3000K

Tunable White 2700K to 6500K

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

## Accessories

### Optional Accessories:

3 Pole or 5 pole pre-wired Wieland connector - 0.5m

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: [www.wirefield.co.uk](http://www.wirefield.co.uk) Email: [sales@wirefield.co.uk](mailto:sales@wirefield.co.uk)