



wirefield PROLED 75 RST

75,000 hrs
L80/B50

**RECESSED
DOWNLIGHT**



Technical Specification

- Powder coated steel body.
- Recessed mounting.
- Micro-prismatic PMMA UV stable diffuser.
- IP44.
- IK05.
- RAL colour options.


Features

Wattage	11w to 26w
Lumens per Watt	Up to 111
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	CRI	L x W x H (mm)	Cut Out (mm)	Weight (kg)
RST1113K	11	1107	3000	80+	260 x 260 x 65	245 x 240	1.5
RST1153K	15	1547	3000	80+	260 x 260 x 65	245 x 240	1.5
RST1203K	20	2084	3000	80+	260 x 260 x 65	245 x 240	1.5
RST1263K	26	2550	3000	80+	260 x 260 x 65	245 x 240	1.5
RST1114K	11	1167	4000	80+	260 x 260 x 65	245 x 240	1.5
RST1154K	15	1631	4000	80+	260 x 260 x 65	245 x 240	1.5
RST1204K	20	2197	4000	80+	260 x 260 x 65	245 x 240	1.5
RST1264K	26	2688	4000	80+	260 x 260 x 65	245 x 240	1.5

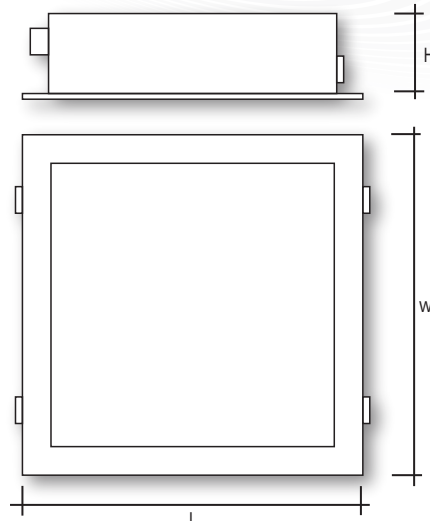

Control Options

Driver Options:

- DALI Driver
- Switch Dim

LED Options

Additional Options:

- CCT 3000K

Emergency Options

Emergency Options:

- 3hr Emergency pack

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS