



wirefield PROLED75 SCP HP

75,000 hrs
L80/B50

DECORATIVE SURFACE
MODULAR



Technical Specification

- Steel body with micro prismatic polycarbonate diffuser.
- White end caps with security screw fixing.
- Surface or suspended mounting.
- IP54.
- IK05.
- Integral emergency options.
- RAL colour options.

Features


Wattage	21w to 63w
Lumens per Watt	Up to 136
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim / Corridor Function
Controls	PIR / MW / MWRF dimming / MWRF non-dimming
Colour Temperature	4000k
Temperature Rating	-15°C to +35°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

wirefield PROLED 75 SCP HP

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
SCP1214KA	21	2593	4000	615 x 97 x 72	1.5
SCP1264KA	26	3225	4000	615 x 97 x 72	1.5
SCP1384KB	38	5185	4000	1175 x 97 x 72	2.3
SCP1504KB	50	6450	4000	1175 x 97 x 72	2.3
SCP1484KC	48	6481	4000	1455 x 97 x 72	2.8
SCP1634KC	63	8062	4000	1455 x 97 x 72	2.8

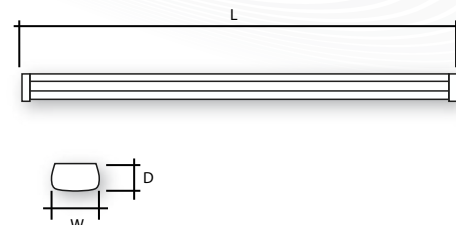

Control Options

Driver Options:

Fixed Output

DALI

Switch Dim

CF - Never off

CF - Off 1 minute

CF - Off 30 minutes

Sensor Options:

PIR

MW - On/Off

MWRF - Corridor function master
or slave dimming

MWRF - Corridor function master
or slave non-dimming

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

Accessories

Optional Accessories:

1.5m Adjustable Suspension Kit

2.0m Transparent 3 x 0.75mm Cable

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: www.wirefield.co.uk Email: sales@wirefield.co.uk