



# wirefield PROLED 75 SRN

**75,000 hrs**  
**L80/B50**

**HIGHBAY**



## Technical Specification

- Slimline die cast aluminium body with glass cover.
- Suspension hook as standard.
- IP65.
- IK08.
- 90° beam angle as standard.
- RAL Colour Options.


## Features

Wattage	78w to 166w
Lumens per Watt	Up to 157
CRI	80
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali
Colour Temperature	4000k
Temperature Rating	-15°C to +30°C

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	Ø x H (mm)	Weight (kg)
SRN1784KA	78	11915	300 x 200	2.7
SRN11254KB	125	19524	335 x 200	3.9
SRN11664KC	166	26076	380 x 200	2.7

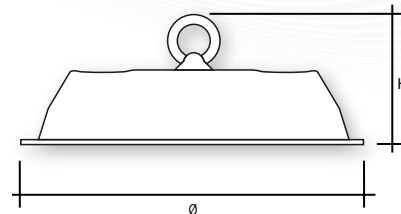

## Control Options

### Driver Options:

Fixed Output

DALI Driver

## LED Options

### Additional Options:

CCT 3000K

## Accessories

### Optional Accessories:

1.0m Suspension Kit

3.0m Suspension Kit

5.0m Suspension Kit

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*