



wirefield

# PROLED 75 TRA HP

**75,000 hrs**  
**L80/B50**

**SURFACE LINEAR**  
**IP65 ANTI-VANDAL**



## Technical Specification

- Steel powder coated white body with opal diffuser fastened with vandal resistant screws in a steel frame.
- Surface mount as standard.
- IP65.
- IK10.
- Integral emergency available.
- RAL colour options.

## Features


Wattage	51w to 64w
Lumens per Watt	Up to 112
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V / Corridor Function
Controls	Microwave
Colour Temperature	4000k
Temperature Rating	-20°C to +40°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

# wirefield PROLED 75 TRA HP

## Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
TRA1514KD	51	5690	4000	1220 x 135 x 135	7.4
TRA1644KE	64	7112	4000	1500 x 135 x 135	9.2

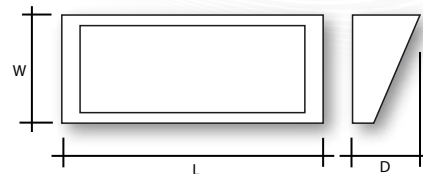

## Control Options

### Driver Options:

Fixed Output

DALI Driver

1-10v

Corridor Function

### Sensor Options:

Microwave

## LED Options

### Additional Options:

CCT 3000K

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

## Accessories/Options

### Optional Accessories:

Various RAL Colours

Security Drill Bit for 2 Hole Fixing

Full photometry and LDT files available on request

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

Tel: 0844 847 5100 Fax: 0844 847 5101 Web: [www.wirefield.co.uk](http://www.wirefield.co.uk) Email: [sales@wirefield.co.uk](mailto:sales@wirefield.co.uk)