



wirefield PROLED 75 WLL

75,000 hrs
L80/B50

**DECORATIVE
WALL MOUNTED**



Technical Specification

- Powder coated light grey steel body.
- Opal polycarbonate diffuser.
- IP44
- IK05
- RAL colour options.


Features

Wattage	14w to 30w
Lumens per Watt	Up to 114
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	L x W x D (mm)	Weight (kg)
WLL1144K	14	1594	4000K	580 x 85 x 75	2.0
WLL1204K	20	2168	4000K	580 x 85 x 75	2.0
WLL1304K	30	2940	4000K	580 x 85 x 75	2.0

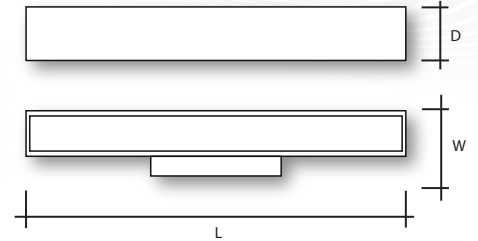

Control Options

Driver Options:

- Fixed Output
- DALI
- Switch Dim

LED Options

Additional Options:

- CCT 3000K

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS