



wirefield RANDO

40,000 hrs
L70/B50

**RECESSED IP44
DOWNLIGHT**



Technical Specification

- Aluminium housing with opal diffuser.
- Recessed mounting.
- IP44.
- IK04.
- Fixed output driver.


Features

Wattage	7w to 20w
Lumens per Watt	Up to 100
CRI	80
L**B**	40,000 hours L70 B50
Driver	Fixed Output
Colour Temperature	4000k
Temperature Rating	0°C to +30°C (excluding emergency)

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	Ø x H (mm)	Cut Out (mm)	Weight (kg)
RAN1073K	7	660	92 x 64	75	0.11
RAN1103K	10	930	113 x 64	95	0.16
RAN1143K	14	1330	174 x 64	150	0.28
RAN1203K	20	1960	244 x 64	200	0.53
RAN1074K	7	700	92 x 64	75	0.11
RAN1104K	10	980	113 x 64	95	0.16
RAN1144K	14	1400	174 x 64	150	0.28
RAN1204K	20	2060	244 x 64	200	0.53

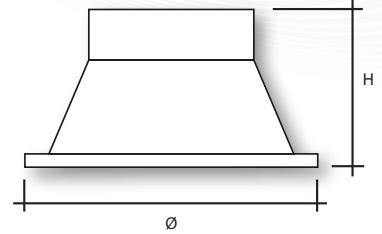

Control Options

Driver Options:

Fixed Output

LED Options

Additional Options:

CCT 3000K

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS