



wirefield RCP

50,000 hrs
L70/B50

**RECESSED IP44
DOWNLIGHT**



Technical Specification

- Aluminium housing with opal diffuser.
- Recessed mounting.
- IP44.
- IK04.


Features

| | |
|--------------------|----------------------|
| Wattage | 10w to 20w |
| Lumens per Watt | Up to 103 |
| CRI | 80 |
| L**B** | 50,000 hours L70 B50 |
| Driver | Fixed Output / DALI |
| Colour Temperature | 4000k |
| Temperature Rating | 0°C to +35°C |

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

| Code | Watts | Delivered lumens | Ø x H (mm) | Cut Out (mm) | Weight (kg) |
|----------|-------|------------------|------------|--------------|-------------|
| RCP1103K | 10 | 1000 | 113 x 55 | 90 | 0.33 |
| RCP1143K | 14 | 1400 | 143 x 59 | 117 | 0.38 |
| RCP1203K | 20 | 2000 | 200 x 68 | 168 | 0.67 |
| RCP1104K | 10 | 1025 | 133 x 55 | 90 | 0.33 |
| RCP1144K | 14 | 1435 | 143 x 59 | 117 | 0.38 |
| RCP1204K | 20 | 2050 | 200 x 68 | 168 | 0.67 |

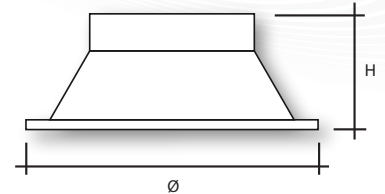

Control Options

Driver Options:

Fixed Output

DALI Driver

LED Options

Additional Options:

CCT 3000K

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS