



Versatile high efficiency compact fluorescent downlight.

Designed and manufactured to comply with EN 60598 and are CE certified.

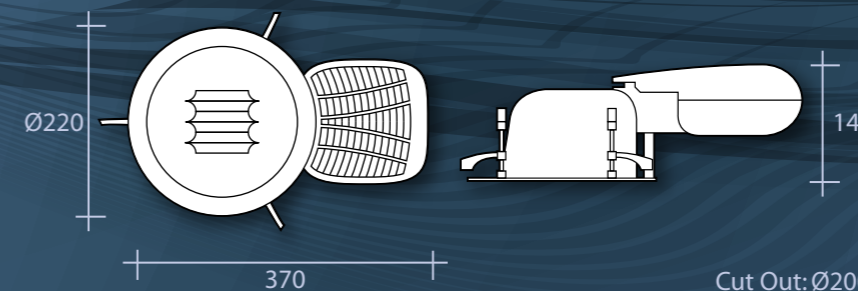

Lamp Options

 TC-D: Compact Fluorescent
2 pin (for switch start)
4 pin (for HF)

 TC-T: Compact Fluorescent

Product Specification

- Certified ingress protection to IP20
- Decorative white ring as standard
- Metalized polycarbonate reflector for optimum efficiency and zero iridescence
- Mechanical fixings for secure installation in any ceiling type
- For photometry details refer to Page 218 graph ref PC040, PC041 and PC042

Optional Order Codes

(Add suffix to order code)

RDL/PC: IP44 Polycarbonate cover - maximum wattage 2 x 18W or 1 x 26W.

RDL/FL: Fresnel lens

Order Codes

Excluding Lamps

Order Code	Watt	Kg	Lamp
RDL113	1 x 13	0.99	TC-D
RDL118	1 x 18	0.99	TC-D
RDL126	1 x 26	1.22	TC-D
RDL132*	1 x 32	0.78	TC-T
RDL142*	1 x 42	0.78	TC-T
RDL213	2 x 13	1.34	TC-D
RDL218	2 x 18	1.34	TC-D
RDL226	2 x 26	1.79	TC-D
RDL232*	2 x 32	0.88	TC-T
RDL242*	2 x 42	0.88	TC-T

* only available with HF Ballast

Example order code:

RDL218/HF - A 2 x 18 watt downlight with high frequency ballast. Supplied without lamps.

Gear options

/HF: High Frequency
/F: 10% Standby Dimming
/D: DSI Digital Dimming

/E3: 3hr Emergency
/E3T: Self Test Emergency

Please check with sales team for compatibility



/PC



/FL



Applications:

- Entrance lobbies
- Client areas
- Small offices
- Retail and showrooms
- Wash rooms

For further downlighter options see
Circulux - pages 162-163
Circu-LED - pages 180-181