



wirefield

# SOFTLED BATTEN

50,000 hrs  
L80/B30

SURFACE LINEAR




Emergency options available

## Technical Specification

- Batten luminaire with steel body and polycarbonate diffuser.
- Surface mount as standard and can be suspended.
- 20mm knockout for retrofit sensor mounting and ease of wiring.
- IP20.
- IK06.
- Integral emergency available.


## Features

Wattage	24w to 96w
Lumens per Watt	Up to 110
CRI	80
L**B**	50,000 hours L80 B30
Driver	Fixed Output / Dali / 1-10V
Controls	PIR / 
Colour Temperature	4000k
Temperature Rating	-20°C to +30°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	A** (mm)	Weight (kg)
BAT4/25/4K	24	2400	1220 x 64 x 45	600	1.0
BAT4/48/4K	46	4600	1220 x 64 x 45	600	1.2
BAT5/38/4K	35	3700	1520 x 64 x 45	600	1.2
BAT5/72/4K	71	6820	1520 x 64 x 45	600	1.3
BAT6/48/4K	46	4635	1820 x 64 x 45	600	1.3
BAT6/92/4K	94	8690	1820 x 64 x 45	600	1.5

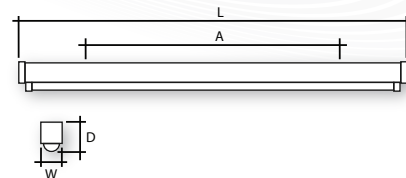

\*\* These dimensions are used for the suspension kits

## Control Options

### Driver Options:

Fixed Output

DALI Driver

1-10v

### Sensor Options:

End Mount PIR

Eye-Wi

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained Self Test with Eye-Wi Reporting

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*