


Code	A	B
<b>SLS35</b>	596	596
<b>SLS53</b>	596	596

# SOFTLED SUSPENDED

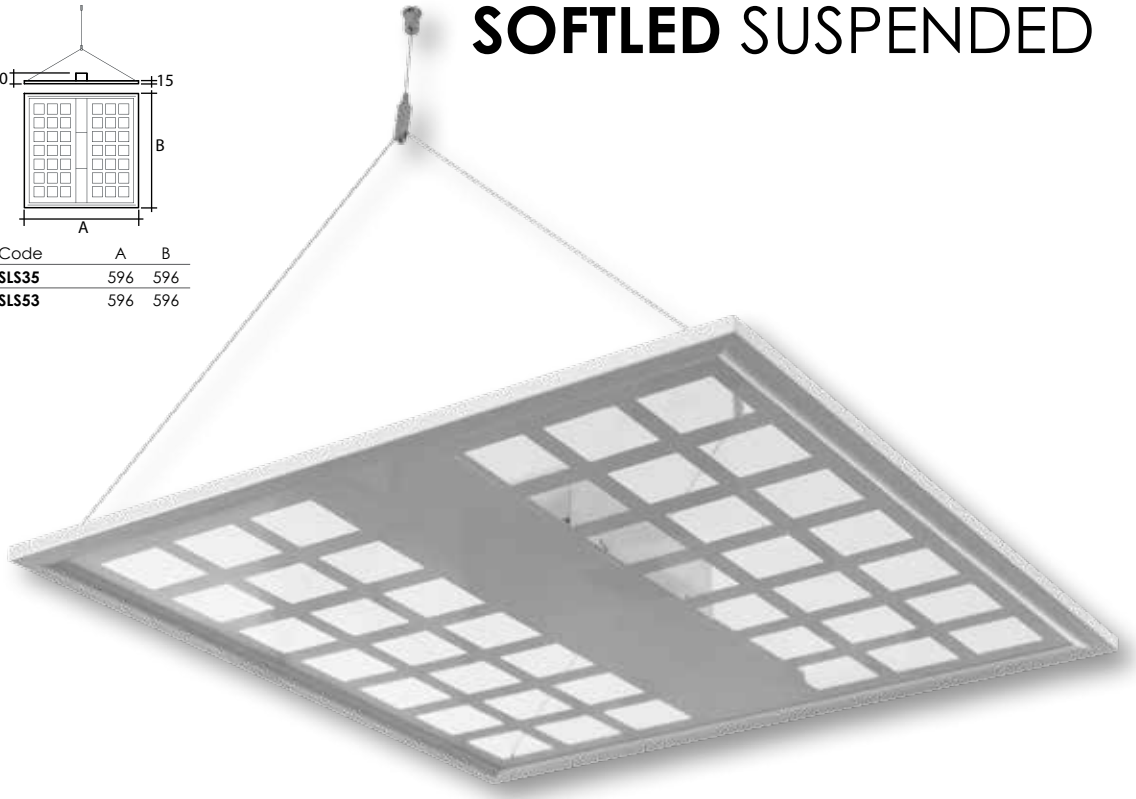

<b>4000K</b> NEUTRAL WHITE	<b>100</b> LM/W	<b>35W/53W</b> LED	<b>3 YEAR*</b> WARRANTY	<b>IP20</b> RATING	<b>CRI</b> >80	<b>30,000*</b> HOURS	<b>OP. TEMP</b> -20°C to +40°C	<b>VOLTAGE</b> AC220 - 240V
-------------------------------	--------------------	-----------------------	----------------------------	-----------------------	-------------------	-------------------------	---	--------------------------------

- SoftLED Suspended (SLS) is a direct/indirect LED luminaire with an acrylic matrix and aluminium cover. It is especially suited for new office builds, meeting rooms, retail applications, reception areas and most commercial applications.
- SLS uses quality high efficiency long life LED's and driver.
- Combining high efficiency optics with excellent energy saving and long life operation with the additional benefit of minimum maintenance. Robust steel powder coated white frame (RAL9003). Aluminium matrix grid with translucent acrylic diffuser.



Code	Description - Excluding Lamps	Watt
<b>SLS35</b>	Suspended direct/indirect 3850 lm - LED	35
<b>SLS53</b>	Suspended direct/indirect 5500 lm - LED	53

**Optional Features** (add suffix to order code)  
 /M3: 3hr integral emergency  
 /VSLV: Dimmable 1 - 10V  
 /LSLV: Digital dimmable DALI

### Potential Return on Investment

<b>Annual cost saving</b> £10,677	<b>Lifetime cost saving</b> £74,745	<b>Lifetime CO<sup>2</sup> reduction</b> 26T/CO <sub>2</sub> e	<b>Extended warranty</b> 3 years
--------------------------------------	--	---	-------------------------------------

*Energy and maintenance savings are based on 18 hour a day, 7 day a week operation against fluorescent modular fittings.*

*Additional savings will be available through the use of lighting controls.*