

wirefield SOLENT

30,000 hrs
L80/B30

FLOODLIGHT



Flexible mounting angles



Adjustable PIR



50w PIR



20w



150w

Technical Specification

- Die cast aluminium housing and glass cover.
- Surface mount via stirrup.
- Available with PIR up to 50w (PIR models are IP54).
- IP65.
- IK08.
- Emergency not available.

This product is not suitable for swimming pool or coastal environments, please speak to Wirefield sales for further information


Features

Wattage	10w to 200w
Lumens per Watt	Up to 105
CRI	80
L**B**	30,000 hours L80 B30
Driver	Fixed Output
Controls	PIR / PEC (Remote)
Colour Temperature	5200k
Temperature Rating	-20°C to +30°C

LIGHTING INNOVATION FOR EXTERIOR APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	L inc PIR (mm)	Weight (kg)
SFLED10W/5K	10	832	117 x 135 x 37	172	0.5
SFLED20W/5K	20	1710	153 x 170 x 40	207	0.8
SFLED30W/5K	30	2844	207 x 235 x 49	250	1.4
SFLED50W/5K	50	4577	247 x 281 x 55	281	2.2
SFLED100W/5K	100	10332	406 x 330 x 65	-	3.0
SFLED150W/5K	150	14419	408 x x 440 x 75	-	5.0
SFLED200W/5K	200	20947	408 x x 440 x 75	-	5.0

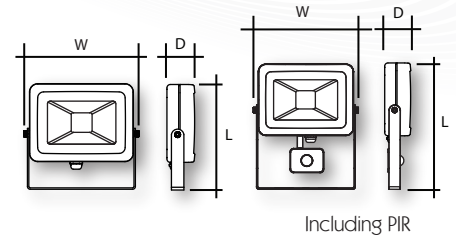

Control Options

Driver Options:

Fixed Output

Sensor Options:

PIR (PIR models are IP54)

PEC (Remote)

Emergency Options

Emergency Options:

Not available

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR EXTERIOR APPLICATIONS