



wirefield SOLENT 2

50,000 hrs
L80/B10

IP66 LED FLOODLIGHT



Technical Specification

- Surface mounted.
- Direct light distribution.
- Impact resistant tempered glass diffuser.
- Optional DALI Dimming
- IP66.
- IK08.
- Multiple beam angles available.


Features

Wattage	100w to 600w
Lumens per Watt	Up to 140
CRI	80+
L**B**	50,000 hours L80 B10
Driver	Fixed output
Colour Temperature	5000k
Temperature Rating	-30°C to +40°C

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	CRI	L x W x D (mm)	Weight (kg)
SFLED2/100/120/5K	100	14000	5000K	80+	315 x 245 x 57	4
SFLED2/150/120/5K	150	21000	5000K	80+	364 x 290 x 57	6.5
SFLED2/200/120/5K	200	28000	5000K	80+	420 x 329 x 57	6.5
SFLED2/300/120/5K	300	33600	5000K	80+	530 x 385 x 60	10.4
SFLED2/400/120/5K	400	42000	5000K	80+	420 x 658 x 57	20.8
SFLED2/500/120/5K	500	70000	5000K	80+	530 x 772 x 60	20.8
SFLED2/600/120/5K	600	84000	5000K	80+	530 x 772 x 60	20.8

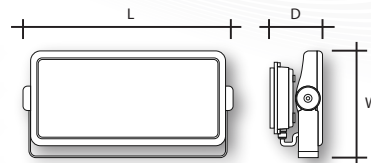

Optics

Additional Options:

- Optics with 30° beam angle
- Optics with 60° beam angle
- Optics with 90° beam angle
- Optics with 120° beam angle
- Optics with asymmetric beam A1
- Optics with asymmetric beam A2

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR EXTERNAL APPLICATIONS