

SPACER II

Solutions Wallpack




AMENITY LIGHTING



- LOW ENERGY**
- 6000K COOL WHITE**
- 3 YEAR* WARRANTY**
- IP65 RATING**
- IK08**
- CRI >80**
- OP. TEMP**
-20°C to +40°C
- VOLTAGE**
AC100 - 240V

- High strength die cast aluminium IP65 black body.
- UV stabilised opal polycarbonate cover and stainless steel screws.
- 120° beam angle.
- Dusk to dawn automatic switching available.

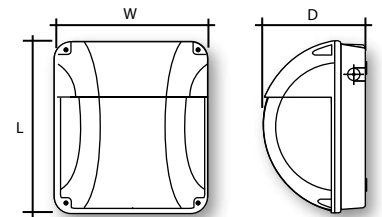

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	Weight (kg)
WPCLED30	30	2866	85	308	265	182	2.7

Optional Features (add suffix to order code)
 /M3: 3hr integral emergency
 /PEC: Dusk to dawn sensing photo-electric cell
 /HM11: Includes microwave sensor for On/Off

Designed & manufactured to comply with EN 60598 and are CE certified.