




wirefield SYS4

100,000 hrs
L80/B50

A surface or suspended LED aluminium profile system allowing for individual or continuous run installation

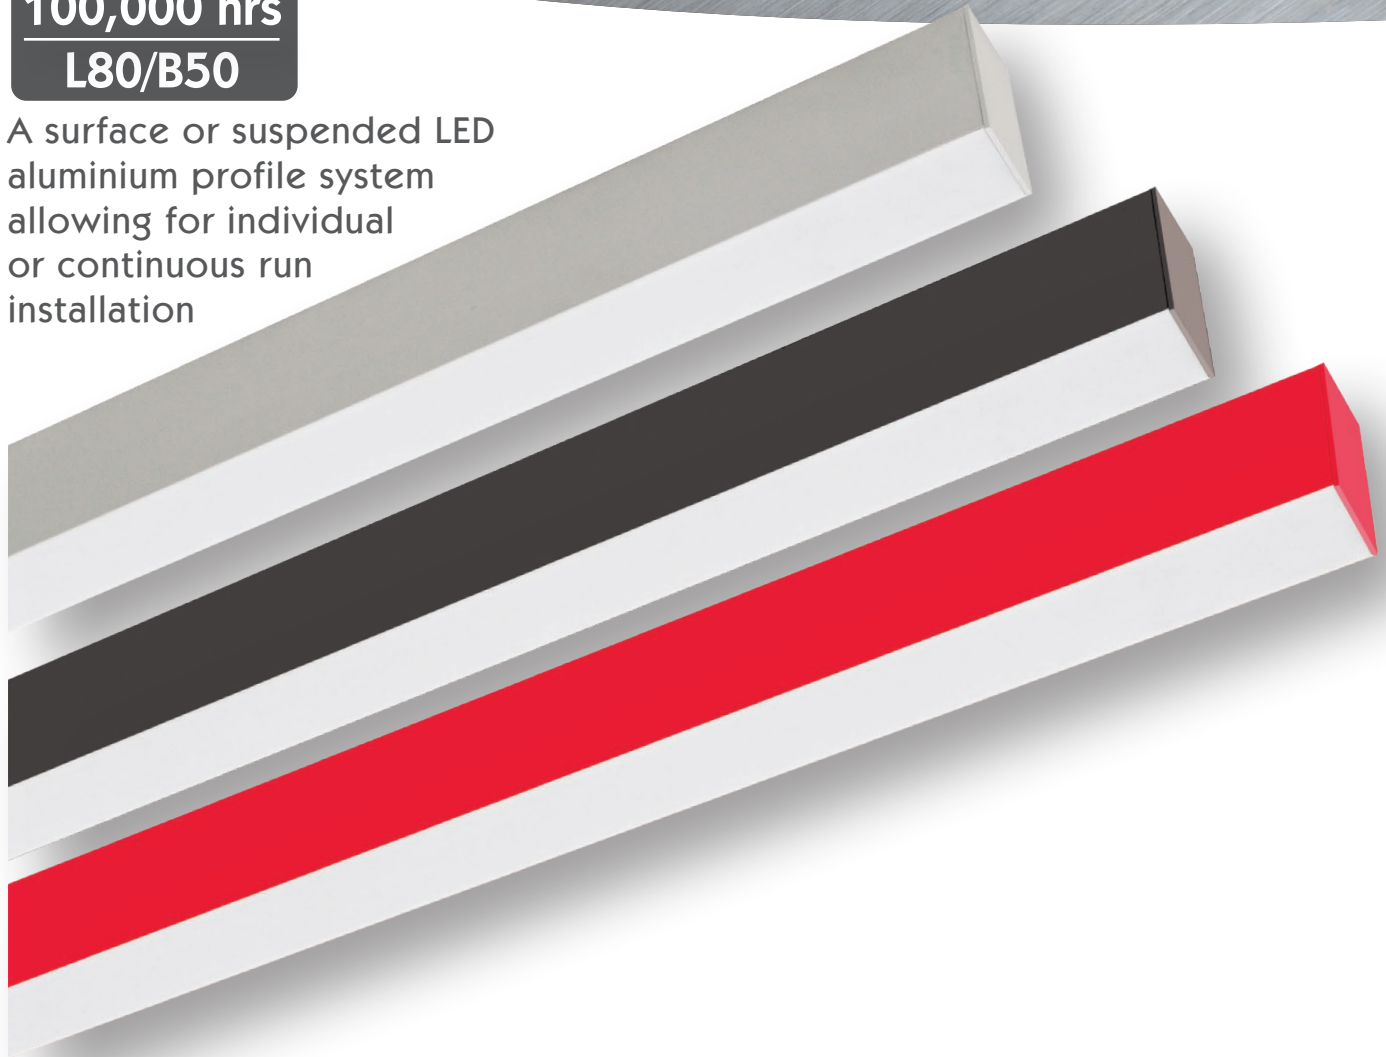

Technical Specification

- 40mm x 75mm profile.
- 6 standard linear lengths.
- IP40.
- IK05.
- A++ energy rating.
- RAL colour options.
- Integral emergency options.

Features

Wattage	7w to 43w
Lumens per Watt	Up to 114
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

PROLED SYSTEM +

Product Specification

LO1 Output


Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS43074K	7	694	576 x 40 x 75	1.3
SYS43164K	10	1041	856 x 40 x 75	1.8
SYS43084K	13	1388	1136 x 40 x 75	2.4
SYS43174K	16	1735	1416 x 40 x 75	2.9
SYS43094K	18	2082	1696 x 40 x 75	3.4
SYS43184K	21	2429	1976 x 40 x 75	4.0

LO2 Output

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS43074K	7	694	576 x 40 x 75	1.3
SYS43164K	10	1041	856 x 40 x 75	1.8
SYS43084K	13	1388	1136 x 40 x 75	2.4
SYS43174K	16	1735	1416 x 40 x 75	2.9
SYS43094K	18	2082	1696 x 40 x 75	3.4
SYS43184K	21	2429	1976 x 40 x 75	4.0

LO3 Output

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS43074K	7	694	576 x 40 x 75	1.3
SYS43164K	10	1041	856 x 40 x 75	1.8
SYS43084K	13	1388	1136 x 40 x 75	2.4
SYS43174K	16	1735	1416 x 40 x 75	2.9
SYS43094K	18	2082	1696 x 40 x 75	3.4
SYS43184K	21	2429	1976 x 40 x 75	4.0



Control Options

Driver Options:

Fixed Output

DALI

1-10v

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

LED Options

Additional Options:

CCT 3000K

Accessories

Optional Accessories:

5-pole terminal block in middle of luminaire for easy through wiring

Through wiring 3 x 1.5 mm² with two push-in terminal blocks

Through wiring 5 x 1.5 mm² with two push-in terminal blocks

Strain relief for power supply cable

Strain relief for power supply cable, 2pcs

2.0m spiral cable 3 x 0.75mm² for suspended luminaire - white

2.0m cable 3 x 0.75mm² for suspended luminaire - white

2.0m cable 3 x 0.75mm² for suspended luminaire - transparent

1.5m adjustable suspension kit

Wall mounting kit

Pull switch

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

PROLED SYSTEM+