



wirefield SYS5-R

100,000 hrs
L80/B50

A recessed LED aluminium profile system allowing for individual or continuous run installation



Technical Specification

- 55mm x 75mm profile.
- 6 standard linear lengths.
- IP40.
- IK05.
- A++ energy rating.
- RAL colour options.
- Integral emergency options.

Features

Wattage	7w to 43w
Lumens per Watt	Up to 114
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

PROLED SYSTEM+

Product Specification

LO1 Output


Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS5R1294K	7	694	595 x 55 x 75	1.5
SYS5R1384K	10	1041	875 x 55 x 75	2.0
SYS5R1304K	13	1388	1155 x 55 x 75	2.7
SYS5R1394K	16	1735	1435 x 55 x 75	3.2
SYS5R1314K	18	2082	1715 x 55 x 75	3.7
SYS5R1404K	21	2429	1995 x 55 x 75	4.4

LO2 Output

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS5R1324K	10	949	595 x 55 x 75	1.5
SYS5R1414K	14	1424	875 x 55 x 75	2.0
SYS5R1334K	17	1898	1155 x 55 x 75	2.7
SYS5R1424K	22	2373	1435 x 55 x 75	3.2
SYS5R1344K	25	2847	1715 x 55 x 75	3.7
SYS5R1434K	30	3322	1995 x 55 x 75	4.4

LO3 Output

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS5R1354K	13	1315	595 x 55 x 75	1.5
SYS5R1444K	19	1973	875 x 55 x 75	2.0
SYS5R1364K	25	2630	1155 x 55 x 75	2.7
SYS5R1454K	31	3288	1435 x 55 x 75	3.2
SYS5R1374K	37	3945	1715 x 55 x 75	3.7
SYS5R1464K	43	4603	1995 x 55 x 75	4.4

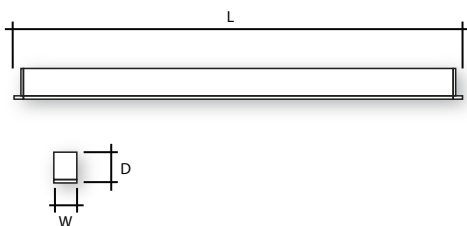

Control Options

Driver Options:

Fixed Output

DALI

1-10v

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

LED Options

Additional Options:

CCT 3000K

Accessories

Optional Accessories:

5-pole terminal block in middle of luminaire for easy through wiring

Through wiring 3 x 1.5 mm² with two push-in terminal blocks

Through wiring 5 x 1.5 mm² with two push-in terminal blocks

Strain relief for power supply cable

Strain relief for power supply cable, 2pcs

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

PROLED SYSTEM+