




wirefield SYS6-MP

100,000 hrs
L80/B50

A surface or suspended LED aluminium profile system allowing for individual or continuous run installation

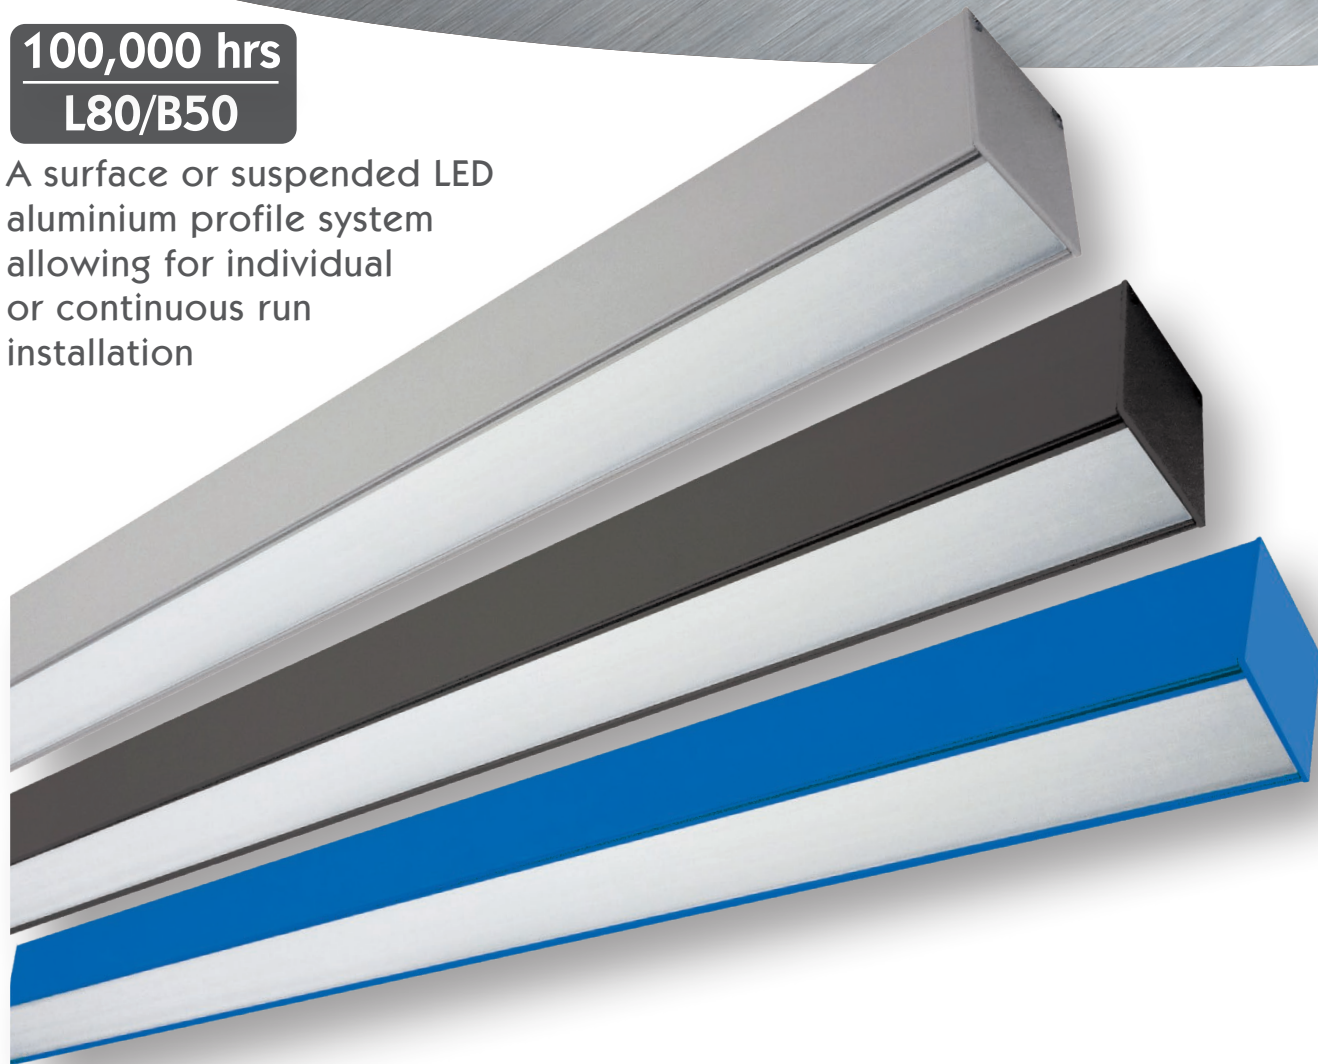

Technical Specification

- 58mm x 68mm profile.
- 11 standard linear lengths.
- Micro-prismatic diffuser.
- Wide choice of accessories for configurable layout.
- IP40.
- IK05.
- A++ energy rating.
- RAL colour options.
- Integral emergency options

Features

Wattage	7w to 64w
Lumens per Watt	Up to 144
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / 1-10V
Colour Temperature	4000k
Temperature Rating	-15°C to +35°C (excluding emergency)

PROLED SYSTEM +

Product Specification

LO1 Output


Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS65184KP	7	856	577 x 58 x 68	1.3
SYS63564KP	10	1284	857 x 58 x 68	1.8
SYS63594KP	13	1712	1137 x 58 x 68	2.3
SYS63614KP	16	2140	1417 x 58 x 68	2.6
SYS63634KP	18	2568	1697 x 58 x 68	3.1
SYS63694KP	21	2996	1977 x 58 x 68	3.4
SYS63724KP	24	3424	2257 x 58 x 68	4.0
SYS63744KP	27	3852	2537 x 58 x 68	4.6
SYS63794KP	31	4494	2957 x 58 x 68	5.0

LO2 Output

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS63544KP	10	1171	577 x 58 x 68	1.3
SYS63574KP	14	1756	857 x 58 x 68	1.8
SYS63604KP	17	2341	1137 x 58 x 68	2.3
SYS61364KP	22	2927	1417 x 58 x 68	2.6
SYS63644KP	25	3512	1697 x 58 x 68	3.1
SYS63704KP	30	4097	1977 x 58 x 68	3.4
SYS63734KP	34	4682	2257 x 58 x 68	4.0
SYS63754KP	38	5268	2537 x 58 x 68	4.6
SYS63804KP	44	6146	2957 x 58 x 68	5.0

LO3 Output

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
SYS63554KP	13	1622	577 x 58 x 68	1.3
SYS63584KP	19	2433	857 x 58 x 68	1.8
SYS62964KP	25	3244	1137 x 58 x 68	2.3
SYS63624KP	31	4055	1417 x 58 x 68	2.6
SYS63654KP	37	4866	1697 x 58 x 68	3.1
SYS63714KP	43	5677	1977 x 58 x 68	3.4
SYS63044KP	49	6487	2257 x 58 x 68	4.0
SYS63764KP	55	7298	2537 x 58 x 68	4.6
SYS63814KP	64	8515	2957 x 58 x 68	5.0



Control Options

Driver Options:

Fixed Output

DALI

1-10v

Sensor Options:

Smart sensor with wireless communication and grouping options

Self-learning sensor

Emergency Options

Emergency Options:

3hr Integral Maintained

3hr Integral Maintained with Self Test

3hr Integral with DALI Interface

LED Options

Additional Options:

CCT 3000K

Tunable white – 2700K to 6500K

Accessories

Optional Accessories:

L T and X jointing pieces

5-pole terminal block in middle of luminaire for easy through wiring

Through wiring 3 x 1.5 mm² with two push-in terminal blocks

Through wiring 5 x 1.5 mm² with two push-in terminal blocks

Strain relief for power supply cable

Strain relief for power supply cable, 2pcs

2.0m spiral cable 3 x 0.75mm² for suspended luminaire - white

2.0m cable 3 x 0.75mm² for suspended luminaire - white

2.0m cable 3 x 0.75mm² for suspended luminaire - transparent

1.5m adjustable suspension kit

Wall mounting kit

Pull switch

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

PROLED SYSTEM+