



wirefield

# TAURUS ZONE 1

**70,000 hrs**  
**L80/B10**

IP65  
HAZARDOUS  
AREA



## Technical Specification

- Aluminium extrusion with polycarbonate end caps and diffuser.
- Surface mounted with flexible fixing centres from 100mm.
- Atex Zone 1, 21 approved.
- IP65.
- Tested for areas of high risk of mechanical impact.
- Integral emergency available.


## Features

Wattage	28w to 71w
Lumens per Watt	Up to 70
CRI	80
L**B**	70,000 hours L80 B10
Driver	Fixed Output / Dali
Controls	None Integral
Colour Temperature	4000k
Temperature Rating	-20°C to +50°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	A (mm)	Zone	Weight (kg)
ZON128-9/LED	30	2106	760 x 193 x 142	450	1 and 2	7.0
ZON157-9/LED	60	4212	1365 x 193 x 142	1055	1 and 2	11.2
ZON171-9/LED	75	5265	1665 x 193 x 142	1355	1 and 2	13.0

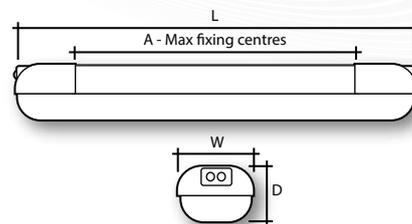

## Control Options

### Driver Options:

Fixed Output

DALI Driver

## Emergency Options

### Emergency Options:

3hr Integral Maintained

## Certification Numbers

CML 16ATEX 3397X

IECEX CML 16.0149X

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*