



wirefield

# TAURUS ZONE 1&2

**70,000 hrs**  
**L80/B10**

IP66  
HAZARDOUS  
AREA



## Technical Specification

- Corrosion resistant aluminium body.
- Surface mounted via steel swivel bracket.
- Atex Zone 1, 21 or 2, 22 approved.
- IP66.
- Tested for areas of high risk of mechanical impact.
- Emergency not available


## Features

Wattage	156w
Lumens per Watt	Up to 153
CRI	80
L**B**	70,000 hours L80 B10
Driver	Fixed Output
Controls	None Integral
Colour Temperature	4000k
Temperature Rating	-40°C to +55°C

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Zone	Weight (kg)
ZLED/IND/1/10000	84	10000	400 x 400 x 231	1	11.0
ZLED/IND/2/12770	84	12770	400 x 400 x 231	2	11.0
ZLED/IND/1/19000	156	19000	400 x 400 x 231	1	11.0
ZLED/IND/2/24000	156	24000	400 x 400 x 231	2	11.0

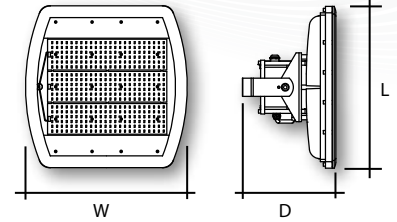

\*\* These dimensions are used for the suspension kits

## Control Options

Driver Options:

Fixed Output

## Certification Numbers

CML 17ATEX 3027X

IECEX CML 17.0018X

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*