




TAURUS ZONE 1 & 2

Industrial IP66



HAZARDOUS AREA LIGHTING

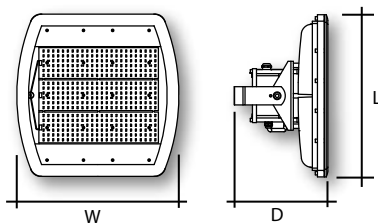

- Corrosion resistant aluminium body.
- Steel swivel mounting bracket.
- 2 M20/M25 cable entries.
- Integral control gear.

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	Zone	Weight (kg)
ZLED/IND/1/19000	156	19000	121	400	400	231	1	11.0
ZLED/IND/2/24000	156	24000	153	400	400	231	2	11.0

Ambient temperature guidance

High frequency -40°C to +55°C

II2 G D Ex eb mb op is IIC T4 Gb

Ex tb op is T135°C IIIC Db

Zones 1, 21, 2 & 22

Note - this is not a stock item please allow 5 weeks for delivery.

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.