


TAURUS ZONE 1


Linear IP65

LED 

HAZARDOUS AREA LIGHTING



- Suitable for Zone 1 hazardous area applications.
- Aluminium extrusion with polycarbonate end caps and diffuser.
- Captive diffuser with isolation switch for easy maintenance.
- 3hr maintained emergency versions available.
- Flexible fixing centres from as little as 100mm via quick fit T bolt.

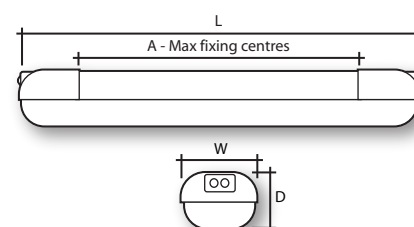

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	A max (mm)	Weight (kg)
ZON128-9/LED	28	2297	82	760	193	142	450	7.0
ZON157-9/LED	57	4514	79	1365	193	142	1055	11.2
ZON171-9/LED	71	5745	81	1665	193	142	1355	13.0

Optional Features (add suffix to order code)
/M3: 3hr integral emergency

Ambient temperature guidance

High frequency -20°C to +50°C

Integral emergency 0°C to +25°C

Ex eb mb op is IIC Gb T4

Ex tc op is T86°C IIIB Dc

Zones 1, 2 & 22

Note - this is not a stock item please allow 5 weeks for delivery.

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.