



TAURUS ZONE 1

T8 IP66

HAZARDOUS AREA LIGHTING



- Zone 1, Cat 2 highly durable and versatile fluorescent luminaires.
- High frequency control gear.
- Rugged construction with flexible mounting centres.
- Discreet locking arrangement for the diffuser guarantees a perfect seal and easy maintenance.
- Fire retardant UV stabilised impact resistant polycarbonate body and diffuser.

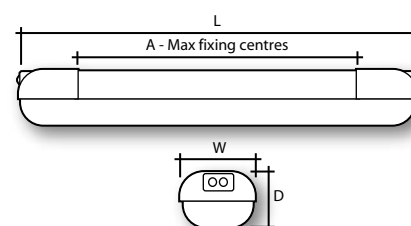

Code	Watts	L (mm)	W (mm)	D (mm)	A (mm)	Weight (kg)
ZON218-9/HF	2x18	765	192	142	450	5.7
ZON236-9/HF	2x36	1375	192	142	1060	9.2
ZON258-9/HF	2x58	1675	192	142	1260	10.5

Optional Features (add suffix to order code)
/M3: 3hr emergency

Ambient temperature guidance

High frequency T4 -20°C to +55°C

High frequency T5 -20°C to +25°C

Integral emergency 0°C to +25°C

Certification code: EEx ed IIC 2G 3D

T4 (Tamb -20 to +55°C).

T5 (Tamb -20 to +25°C).

Certificate number: SIRA 00 ATEX 3071.

Note - this is not a stock item please allow 5 weeks for delivery.

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.