



wirefield

# TAURUS ZONE 2

**70,000 hrs**  
**L80/B10**

**SURFACE LINEAR**



## Technical Specification

- GRP body with polycarbonate diffuser.
- Surface mount.
- Atex Zone 2, 22 approved.
- IP65.
- Tested for areas of low risk of mechanical impact.
- Integral emergency available.


## Features

Wattage	28w to 71w
Lumens per Watt	Up to 88
CRI	80
L**B**	70,000 hours L80 B10
Driver	Fixed Output
Controls	None Integral
Colour Temperature	4000k
Temperature Rating	-20°C to +50°C (excluding emergency)

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*

## Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Zone	Weight (kg)
ZEXLED12700	30	2660	702 x 102 x 108	2	2.8
ZEXLED14700	60	5317	1312 x 102 x 108	2	3.2
ZEXLED15700	75	5760	1612 x 102 x 108	2	3.4

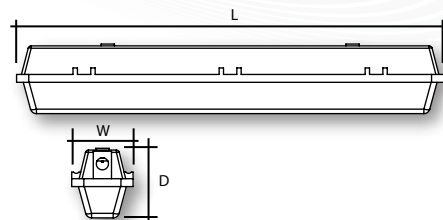

## Control Options

### Driver Options:

Fixed Output

## Emergency Options

### Emergency Options:

3hr Integral Maintained

## Certification Numbers

EN 60079-0-15-31

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS*