




# TAURUS ZONE 2

Linear IP65



HAZARDOUS AREA LIGHTING

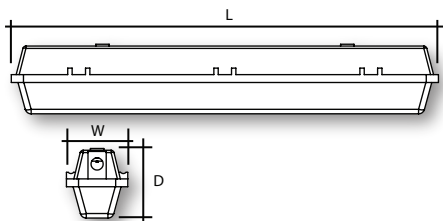

- The Zone LED is an ExnA certified light fitting designed for maximum light output.
- Low maintenance high output LED light source. Energy efficient control.
- Robust, long life GRP moulded body & polycarbonate diffuser.
- Gas Zone 2 and Dust Zone 22 protection.
- Emergency option available.

Code	Watts	Delivered lumens	Lumens per Watt	L (mm)	W (mm)	D (mm)	Weight (kg)
ZEXLED12700	28	2950	105	702	102	108	5.0
ZEXLED14700	56	5900	105	1312	102	108	6.0
ZEXLED15700	71	7375	104	1612	102	108	8.5

**Optional Features** (add suffix to order code)  
/M3: ZEXLED14700 & ZEXLED15700 3hr integral emergency

#### Ambient temperature guidance

High frequency -20°C to +50°C

Integral emergency 0°C to +25°C

Certification code: EEx n c II 3 GD  
T4 (Tamb -40 to +50°C).

Certificate number: Epsilon EX02ATEX1167.

Note - this is not a stock item please allow 3-4 weeks for delivery.

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.