



TAURUS ZONE 2

T8 IP65



HAZARDOUS AREA LIGHTING

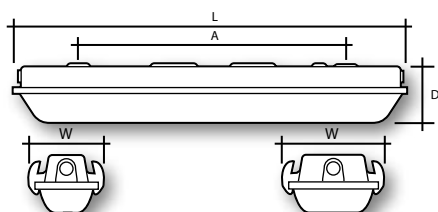

- Zone 2 and 22, Cat 3 highly durable and versatile luminaires.
- Unrestricted breathing enclosure.
- Fire retardant UV stabilised impact resistant injection moulded polycarbonate diffuser.
- Glass fibre re-enforced polyester body for maximum durability.
- Stainless steel diffuser retention clips can be locked for improved vandal resistance.
- Poured neoprene closed cell anti-ageing gasket for a perfect seal.

Code	Watts	L (mm)	W (mm)	D (mm)	A (mm)	Weight (kg)
ZEX136/HF	1x36	1312	102	108	800	3.0
ZEX158/HF	1x58	1612	102	108	1100	4.0
ZEX218/HF	2x18	702	172	108	500	4.5
ZEX236/HF	2x36	1312	172	108	800	4.5
ZEX258/HF	2x58	1612	172	108	1100	5.0

Ambient temperature guidance

High frequency -40°C to +55°C

Integral emergency 0°C to +25°C

Certification code: EEx n c II 3 GD

T4 (Tamb -40 to +55°C).

Certificate number: Epsilon EX02ATEX1167.

Note - this is not a stock item please allow 2-3 weeks for delivery.

Designed & manufactured to comply with EN 60598 and are CE certified.

Luminaire is not designed to be mounted in full external conditions- please speak to the Wirefield sales office for further information.