



wirefield

TWIN PROLED50 PHL HP

50,000 hrs
L80/B50

SINGLE
RECESSED
GIMBAL



Technical Specification

- Powder coated die cast aluminium body.
- Recessed mounting.
- 40° faceted aluminium reflector.
- CRI80 and CRI90 option.
- IP20.


Features

Wattage	18w to 28w
Lumens per Watt	Up to 119
CRI	80+
L**B**	50,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C

LIGHTING INNOVATION FOR RETAIL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	CRI	L x W x H (mm)	Cut Out (mm)	Weight (kg)
PHL2383K80FL	38	4451	3000	80+	350 x 175 x 119	340 x 165	2.4
PHL2553K80FL	55	6005	3000	80+	350 x 175 x 119	340 x 165	2.4
PHL2384K80FL	38	4565	4000	80+	350 x 175 x 119	340 x 165	2.4
PHL2554K80FL	55	6158	4000	80+	350 x 175 x 119	340 x 165	2.4
PHL2383K90FL	37	3677	3000	90+	350 x 175 x 119	340 x 165	2.4
PHL2553K90FL	53	5022	3000	90+	350 x 175 x 119	340 x 165	2.4
PHL2384K90FL	37	3930	4000	90+	350 x 175 x 119	340 x 165	2.4
PHL2554K90FL	53	5368	4000	90+	350 x 175 x 119	340 x 165	2.4

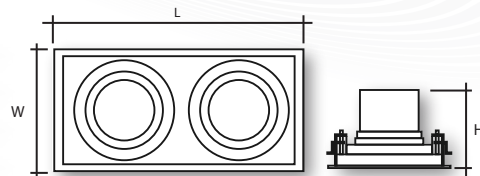

Control Options

Driver Options:

Fixed Output

DALI Driver

Switch Dim

Reflector Options

Additional Options:

24° faceted aluminium reflector

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

LIGHTING INNOVATION FOR RETAIL APPLICATIONS