



wirefield

TWIN PROLED 75 PHL

75,000 hrs
L80/B50

TWIN
RECESSED
GIMBAL



Technical Specification


- Powder coated die cast aluminium body.
- Recessed mounting.
- 40° faceted aluminium reflector.
- CRI80 and CRI90 option.
- IP20.

Wattage	27w & 28w
Lumens per Watt	Up to 119
CRI	80+
L**B**	75,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Colour Temperature	4000k
Temperature Rating	0°C to +35°C

LIGHTING INNOVATION FOR RETAIL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	CCT	CRI	L x W x H (mm)	Cut Out (mm)	Weight (kg)
PHL2283K80FL	28	3208	3000	80+	350 x 175 x 119	340 x 165	2.4
PHL2284K80FL	28	3289	4000	80+	350 x 175 x 119	340 x 165	2.4
PHL2283K90FL	27	2625	3000	90+	350 x 175 x 119	340 x 165	2.4
PHL2284K90FL	27	2805	4000	90+	350 x 175 x 119	340 x 165	2.4

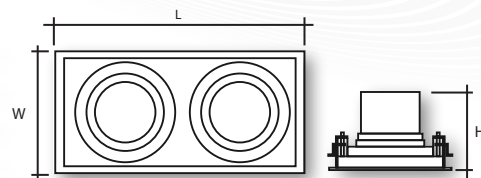

Control Options

Driver Options:

- Fixed Output
- DALI Driver
- Switch Dim

Reflector Options

Additional Options:

- 24° faceted aluminium reflector

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR RETAIL APPLICATIONS