




wirefield
WBLP

50,000 hrs
L80/B50

**IP44 RECESSED
PANEL**

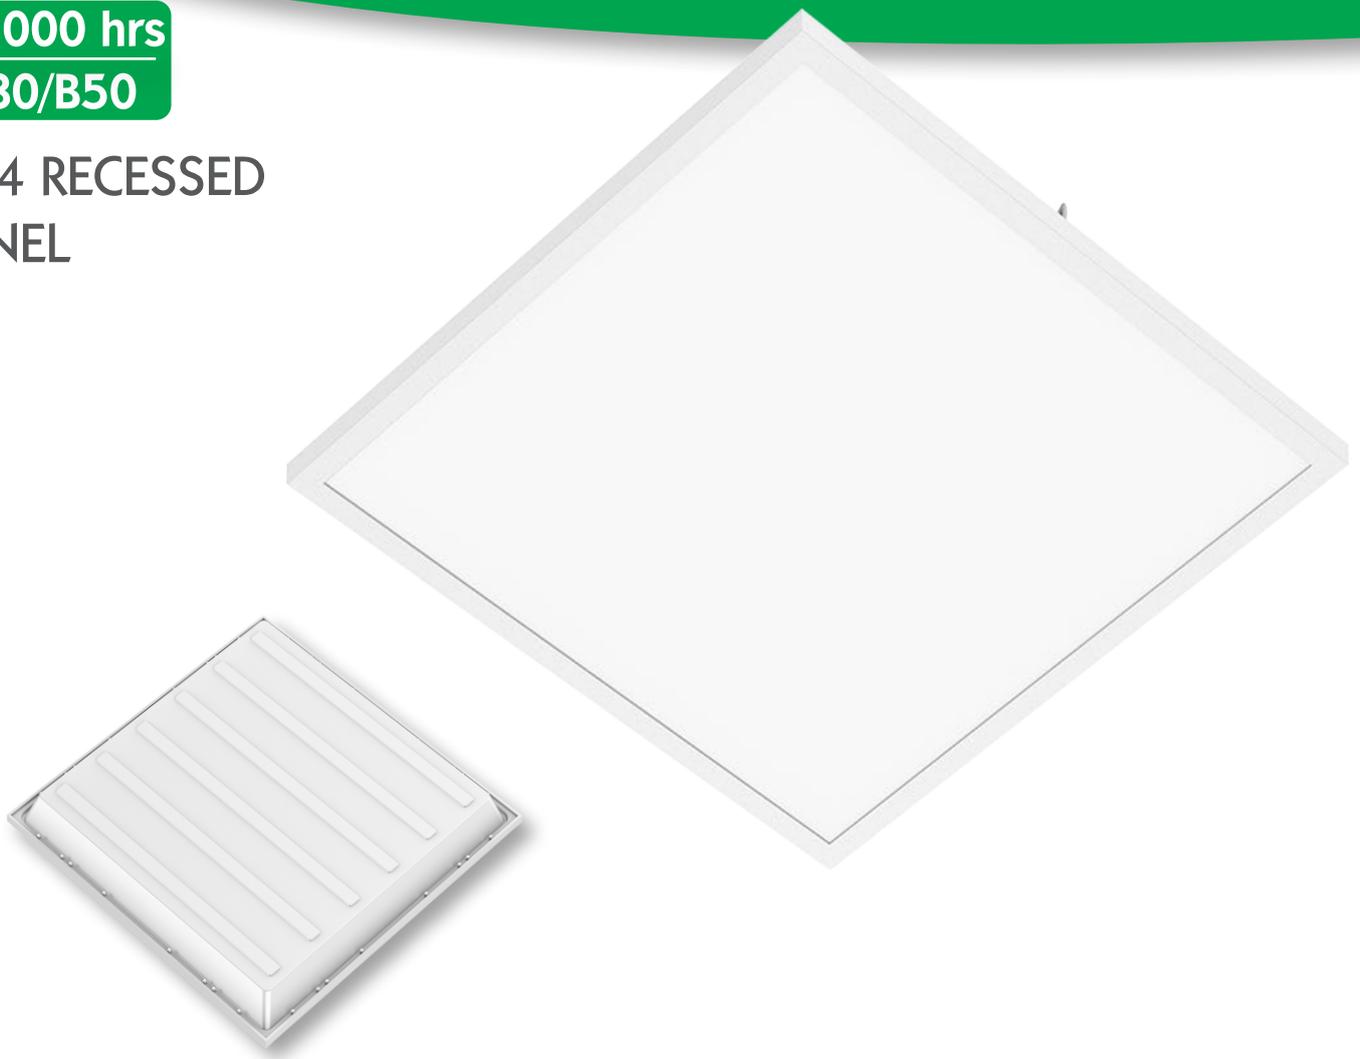

Technical Specification

- Backlit LED design.
- Slimline aluminium frame.
- UGR <22 as standard.
- UGR <19 for small rooms (10m x 5m).
- 600 x 600 lay in grid installation.
- Suitable for 15mm & 24mm T-Bar ceiling.
- IP44.
- IK03.


Features

| | |
|--------------------|--------------------------------------|
| Wattage | 25w to 32W |
| Lumens per Watt | Up to 108 |
| CRI | 80+ |
| L**B** | 50,000 hours L70 B50 |
| Driver | Fixed Output / Switch Dim / Dali |
| Controls | Eye-Wi |
| Colour Temperature | 4000K |
| Temperature Rating | -20°C to +40°C (excluding emergency) |

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS

Product Specification

| Code | Watts | Delivered lumens | L x W x D (mm) | CCT | Weight (kg) |
|-----------|-------|------------------|----------------|------|-------------|
| WBLP25/4K | 25 | 3080 | 595 x 595 x 35 | 4000 | 2.1 |
| WBLP32/4K | 32 | 3675 | 595 x 595 x 35 | 4000 | 2.1 |

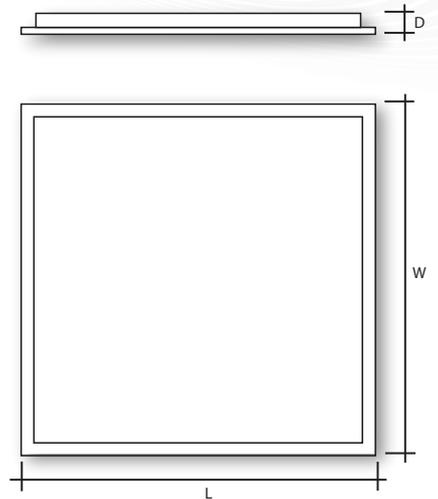

Control Options

Driver Options:

Fixed Output

Switch Dim

DALI

Sensor Options:

Eye-Wi

LED Options

Additional Options:

CCT 3000K

CCT 5000K

CCT 6000K

Emergency Options

Emergency Options:

3hr Emergency

3hr DALI Interface Emergency

3hr Integral Maintained Self Test with Eye-Wi Reporting

Accessories

Optional Accessories:

Surface Mounting Frame

Plasterboard Recess Mounting Frame

Suspension Kit

Full photometry and LDT files available on request

LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS