



wirefield

Wirefield BPB65

30,000 hrs
L70/B50

WEATHERPROOF



Technical Specification

- Polycarbonate body and diffuser.
- Surface mounted or suspended.
- IP65.
- IK07.



Features

Wattage	36w to 48w
Lumens per Watt	100
CRI	70+
L**B**	30,000 hours L70 B50
Driver	Fixed Output
Colour Temperature	4000k
Temperature Rating	-20°C to +40°C (excluding emergency)

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS

Product Specification

Code	Watts	Delivered lumens	L x W x D (mm)	Weight (kg)
BPB1364K	36	3600	1200 x 60 x 35	0.4
BPB1484K	48	4800	1500 x 60 x 35	0.5

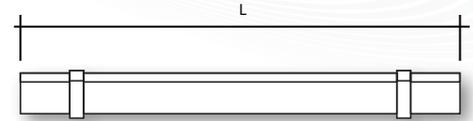

Control Options

Driver Options:

Fixed Output

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

Luminaire is not suitable for full external mounting. Please review the GTB66 luminaire if required and speak to the Wirefield Sales Office for more information.

LIGHTING INNOVATION FOR INDUSTRIAL APPLICATIONS