

WISE

SURFACE MOUNTED FLUORESCENT LUMINAIRES

For general commercial application



A new generation of slim profile surface mounted fluorescent luminaires incorporating a full range of louvre types and control gear options for both T8 and T5 fluorescent tubes. Ideally suited to applications where recessed luminaires can not be used.

Designed and manufactured to comply with EN 60598 and are CE certified.




Available in three versions:

1. T8 with highly specular anodised louvre
2. T8 with low brightness louvre
3. T5 with highly specular anodised louvre



Applications:

- Reception areas
- Commercial offices
- Schools
- Meeting rooms
- Retail applications

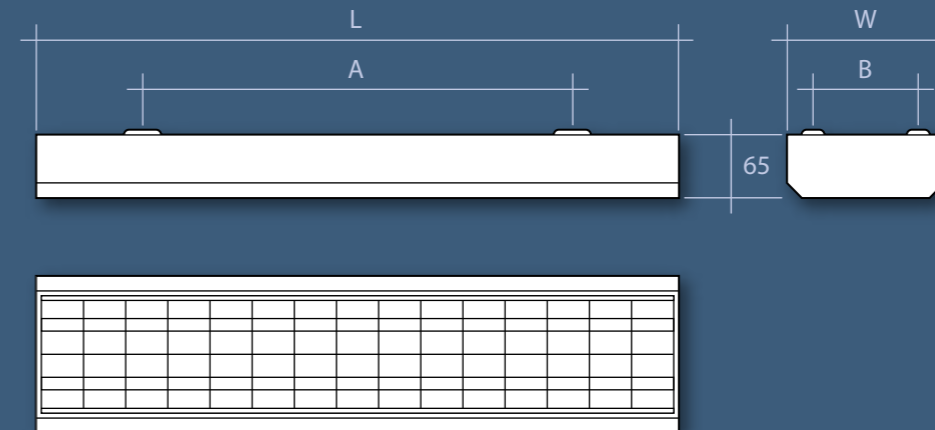

Lamp Options



T8: 26mm Fluorescent Tube
T5: 16mm Fluorescent Tube

Standard Features

- Choice of T8 or T5 fluorescent luminaires
- Quality switch start control gear, high frequency available
- Slim profile neatly blends into the installation
- All louvres are anodised for long and efficient service life
- Powder coated white to RAL9010 for a superior finish
- Louvres are held in place with quick release springs and are fitted with earth leads
- No light spill on the corners for improved visual appearance
- Fabricated on the most modern equipment available to ensure perfect construction

To order Features

(Add suffix to order code)

/HF: High frequency control gear (standard with T5)


/HFDDIM: High frequency digital dimming control gear

/HFADIM: High frequency analogue dimming control gear for T8 tubes only (1-10 volt control)


/E3INT: Integral maintained three hour emergency

/FTB: Fused terminal block


Photometry

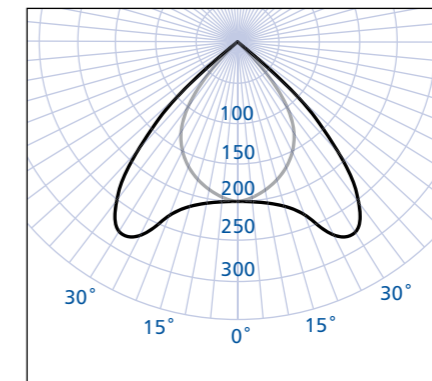

WISE258/C2

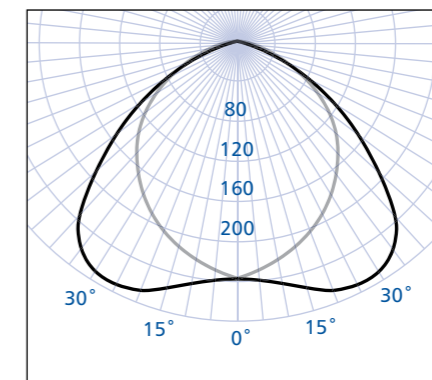

WISE258/LB

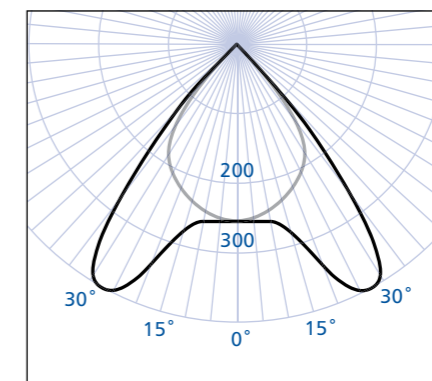

WISE254/T5/HF

Specification Guide

Highly specular louvre – T8 tubes

| Order Code | Watt | L | W | A | B |
|------------|--------|------|-----|------|-----|
| WISE236/C2 | 2 x 36 | 1260 | 266 | 960 | 190 |
| WISE258/C2 | 2 x 58 | 1560 | 266 | 1260 | 190 |

Low brightness louvre – T8 tubes

| Order Code | Watt | L | W | A | B |
|------------|--------|------|-----|------|-----|
| WISE236/LB | 2 x 36 | 1260 | 266 | 960 | 190 |
| WISE258/LB | 2 x 58 | 1560 | 266 | 1260 | 190 |

Highly specular louvre – T5 tubes

| Order Code | Watt | L | W | A | B |
|---------------|--------|------|-----|------|-----|
| WISE254/T5/HF | 2 x 54 | 1213 | 238 | 960 | 190 |
| WISE280/T5/HF | 2 x 80 | 1513 | 238 | 1260 | 190 |

Example order code:
WISE258/C2/HFDDIM – A 2 x 58 watt T8 fluorescent surface mounted luminaire with a highly specular anodised louvre and fitted with digital dimming high frequency control gear. Supplied without lamp.