


ZONE LED



Code	L
ZEXLED12700	702
ZEXLED14700	1312
ZEXLED15700	1612

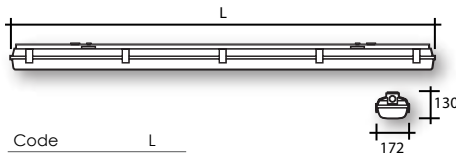

- The Zone LED is an ExnA certified light fitting designed for maximum light output.
- Low maintenance high output LED light source. Energy efficient control.
- Robust, long life GRP moulded body & polycarbonate diffuser.
- Available in 3 lengths.
- Gas Zone 2 and Dust Zone 22 protection.
- Emergency option available.



Code	Description	Watt
ZEXLED12700	Zone 2 & 22 Cat 3 2950 lm, length 702mm - LED	28
ZEXLED14700	Zone 2 & 22 Cat 3 5900 lm, length 1312mm - LED	56
ZEXLED15700	Zone 2 & 22 Cat 3 7375 lm, length 1612mm - LED	71

Optional Features (add suffix to order code)
 /M3: ZEXLED14700 & ZEXLED15700 3hr integral emergency

Ambient temperature guidance
 High frequency -40°C to +50°C
 Integral emergency 0°C to +25°C
 Certification code: EEx n c II 3 GD
 T4 (Tamb -40 to +50 degrees centigrade).
 Certificate number: Epsilon EX02ATEX1167.

HAZARDOUS AREA LIGHTING